

**CABLE SUPPORT SERIES**

**电缆桥架系列**

**江苏铭固机电有限公司**

Jiangsu Minggu Electromechanical Co.Ltd.



## 公司简介 COMPANY BRIEF INTRODUCTION

江苏铭固机电有限公司专业生产高低压开关柜、抗震支架、管廊支架、电力支架、电缆桥架、母线槽、电加热器、电梯配件等系列产品。

公司拥有精湛的技术管理人员和完善的质量保证体系，已经通过国家强制性3C认证及质量管理体系认证。公司凭借雄厚的技术力量、精良的生产设备、完备的检验手段，形成了完整的产品系列，并通过产品的引进和研发，不断实现产品的升级换代，以一流的技术、优良的品质、完善的服务赢得了用户，占领了市场。

本着“领先一步，精益求精”的企业发展精神，我们将进一步加强管理、优化结构、扩大规模。我们真诚期待并热忱欢迎国内外各界人士光临惠顾、洽谈合作、共同发展！我们愿以实力铸造产品的质量，以质量打造信誉，以信誉塑造诚信，以优质服务争取您的满意！

Jiangsu Minggu Electromechanical Co., Ltd. specializes in the production of high and low voltage switchgear, anti-vibration brackets, pipe gallery brackets, power brackets, cable trays, busway, electric heaters, elevator accessories and other products. The company has superb technical management and improve the quality assurance system, has been through the national mandatory 3 C certification and quality management system certification. Companies with strong technical force, sophisticated production equipment, a complete means of testing, formed a complete product line, and through the introduction of products and research and development, and constantly upgrade the product to first-class technology, excellent quality, perfect Service won the user, occupied the market.

In the "one step ahead, excellence," the spirit of enterprise development, we will further strengthen the management, optimize the structure, expand the scale. We sincerely look forward to and warmly welcome all walks of life at home and abroad throughout the visit, to discuss cooperation and common development! We would like to strength casting the quality of products to build credibility to the credibility of shaping the integrity, quality service for your satisfaction!

# 目 录

## Table of Contents

### 电缆桥架系列

电缆桥架型号表示法 .....	1
XQJ梯级式电缆桥架 .....	2
XQJ托盘式电缆桥架 .....	4
XQJ槽式电缆桥架 .....	6
DJ大跨距电缆桥架 .....	12
XQJ电缆竖井 .....	14
LQJ铝镁合金电缆桥架 .....	16
FQJ防火电缆桥架 .....	21
BQJ玻璃钢电缆桥架 .....	24
电缆桥架附件 .....	25

# 电缆桥架型号表示法

## 电缆桥架型号表示法 Cable Support Accessories




- 表示电缆桥架规格或规格序号  
Sizes or No. of sizes
- 表示电缆桥架类别种类序号  
No. of types
- 表示结构型式（用中文第一个汉语拼音的大写字母）  
T表示梯级式，P表示托盘式，C表示槽式  
Structural forms (Starting with the first capital head in chinese prununciation)  
T-ladder type, P-Tray type, C-channel type
- 表示电缆桥架系列号（见下表）  
cable support series

名称	代号	名称	代号
钢制桥架	XQJ	大跨距桥架	DJ
铝合金桥架	LQJ	玻璃钢桥架	BQJ
防火电缆桥架	FQJ		

## 电缆桥架空间布置示意图 Cable bridgeframe space arrangement


电缆桥架空间布置示意图  
Spatial schematic map for cable support

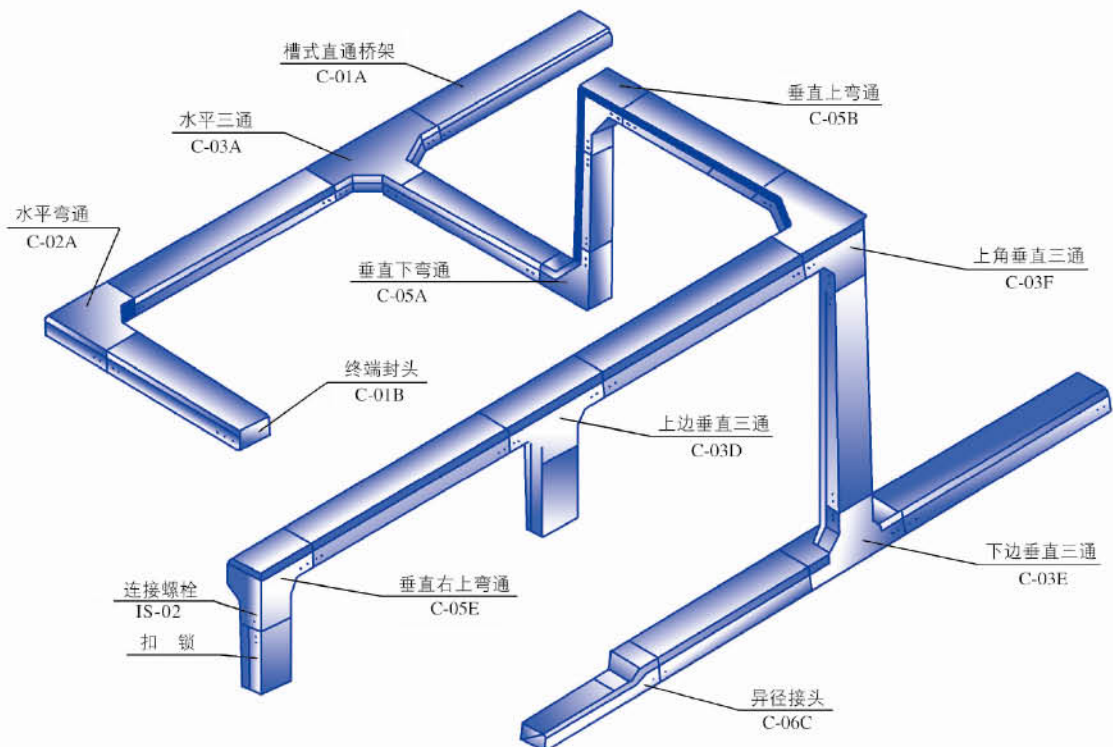

# XQJ梯级式电缆桥架


梯级式桥架是根据国外有关技术及我公司产品的特点改进而成。它具有重量轻、成本低、造型别致、通风散热性能好等特点。它适用于一般直径较大的电缆敷设，特别适用于高、低压动力电缆的敷设。

Ladder-type cable support systems are products manufactured at this factory by referring to relevant technical data of other countries and maintaining the characteristics of the original products of this factory. It features small weight, low cost, unique shaping, fine permeability and quick heat dissipation. It is applicable for laying of big-diameter cables, especially high-voltage, low-voltage and power cables.

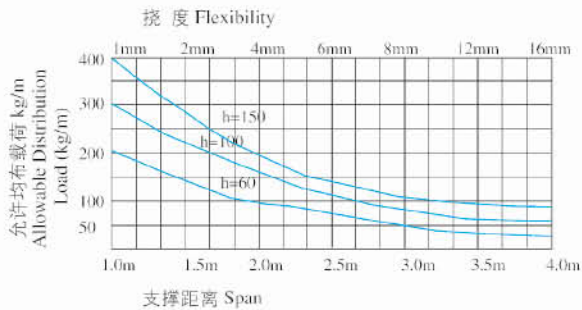


## XQJ-T-01 梯级直通

XQJ-T-01 Ladder-type straight Cable support

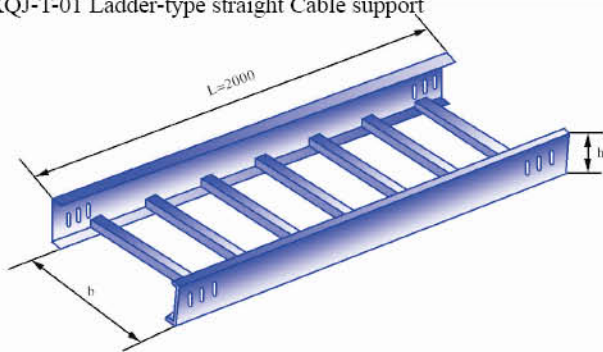


## XQJ-T-02 水平弯通

XQJ-T-02 Ladder-type horizontal bend

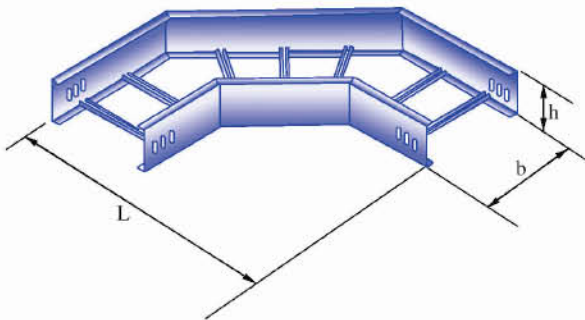

## XQJ-T-03 水平三通

XQJ-T-03 Ladder type horizontal Tee

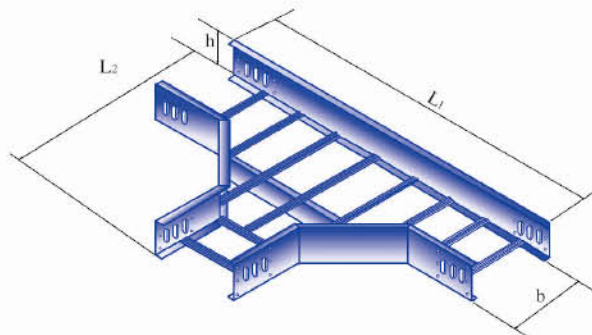

序号No.	型号 Model	b (mm)	h (mm)	重量 kg Weight
1	T-01-6-2	200	60	12.54
2	T-01-10-2		100	19.15
3	T-01-15-2	300	150	28.50
4	T-01-6-3		60	13.81
5	T-01-10-3	100	20.43	
6	T-01-15-3	400	150	29.78
7	T-01-6-4		60	20.57
8	T-01-10-4	100	24.99	
9	T-01-15-4	500	150	31.04
10	T-01-20-4		200	37.63
11	T-01-6-5	600	60	22.97
12	T-01-10-5		100	26.27
13	T-01-15-5	150	32.32	
14	T-01-20-5	800	200	39.17
15	T-01-6-6		60	24.24
16	T-01-10-6	100	27.53	
17	T-01-15-6	600	150	33.58
18	T-01-20-6		200	40.71
19	T-01-6-8	800	60	27.88
20	T-01-10-8		100	30.08
21	T-01-15-8	150	36.12	
22	T-01-20-8	200	43.79	

说明：高度h=60、100为单排连接孔，高h=150为双排连接孔。  
Description:h=60, single-row connection holes;h=150,double-row connection holes

序号No.	型号 Model	b (mm)	h (mm)	L (mm)	重量 kg Weight
1	T-02-6-2	200	60	500	6.48
2	T-02-10-2		100	7.66	
3	T-02-15-2	300	150	13.20	
4	T-02-6-3		60	8.21	
5	T-02-10-3	100	9.53		
6	T-02-15-3	400	150	16.45	
7	T-02-6-4		60	8.77	
8	T-02-10-4	100	10.84		
9	T-02-15-4	500	150	18.39	
10	T-02-20-4		200	22.30	
11	T-02-6-5	600	60	11.58	
12	T-02-10-5		100	13.87	
13	T-02-15-5	800	150	21.34	
14	T-02-20-5		200	25.87	
15	T-02-6-6	900	60	13.42	
16	T-02-10-6		100	16.06	
17	T-02-15-6	1000	150	23.54	
18	T-02-20-6		200	28.53	
19	T-02-6-8	800	60	14.95	
20	T-02-10-8		100	17.88	
21	T-02-15-8	1200	150	27.94	
22	T-02-20-8		200	33.87	

说明：高度h=60、100为单排连接孔，高h=150为双排连接孔。  
Description:h=60, single-row connection holes;h=150,double-row connection holes


序号No.	型号 Model	规格 Size	h (mm)	L1 (mm)	L2 (mm)	重量 kg Weight
1	T-03-6-2	200	60	800	500	9.44
2	T-03-10-2		100			11.73
3	T-03-15-2		150	21.16		
4	T-03-6-3	300	60	900	600	12.01
5	T-03-10-3		100			13.59
6	T-03-15-3		150	23.32		
7	T-03-6-4	400	60	1100	700	13.42
8	T-03-10-4		100			16.02
9	T-03-15-4		150	26.44		
10	T-03-20-4	500	200	1200	800	32.05
11	T-03-6-5		60			15.16
12	T-03-10-5		100	17.95		
13	T-03-15-5	600	150	1300	900	28.68
14	T-03-20-5		200			34.76
15	T-03-6-6		60	16.94		
16	T-03-10-6	800	100	1200	1000	19.88
17	T-03-15-6		150			33.02
18	T-03-20-6		200	37.60		
19	T-03-6-8	800	60	1400	1100	20.59
20	T-03-10-8		100			23.74
21	T-03-15-8		150	35.89		
22	T-03-20-8	200	40.08			

说明：高度h=60、100为单排连接孔，高h=150为双排连接孔。  
Description:h=60, single-row connection holes;h=150,double-row connection holes

# XQJ梯级式电缆桥架

## XQJ-T-04 水平四通

XQJ-T-04 Ladder type horizontal Cross

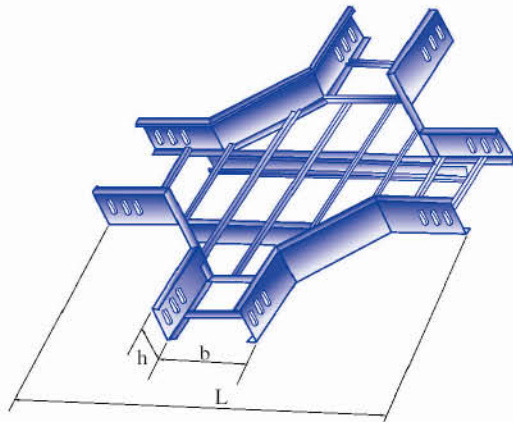


序号No.	型号 Model	b (mm)	h (mm)	L (mm)	重量 kg Weight
1	T-04-6-2	200	60	800	12.36
2	T-04-10-2		100		14.85
3	T-04-15-2		150		26.24
4	T-04-6-3	300	60	900	14.79
5	T-04-10-3		100		16.96
6	T-04-15-3		150		28.35
7	T-04-6-4	400	60	1100	17.00
8	T-04-10-4		100		19.67
9	T-04-15-4		150		30.56
10	T-04-20-4	200	37.04		
11	T-04-6-5	500	60	1100	19.27
12	T-04-10-5		100		21.88
13	T-04-15-5		150		34.89
14	T-04-20-5	200	39.65		
15	T-04-6-6	600	60	1200	22.31
16	T-04-10-6		100		25.06
17	T-04-15-6		150		37.40
18	T-04-20-6	200	42.50		
19	T-04-6-8	800	60	1400	26.96
20	T-04-10-8		100		29.63
21	T-04-15-8		150		38.29
22	T-04-20-8	200	47.86		

说明: 高度h=60、100为单排连接孔, 高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes


## XQJ-T-05A 垂直凹弯通

XQJ-T-05A Ladder type straight concave bend

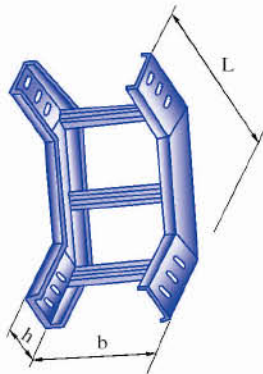

## XQJ-T-05B 垂直凸弯通

XQJ-T-05B Ladder type straight convex bend

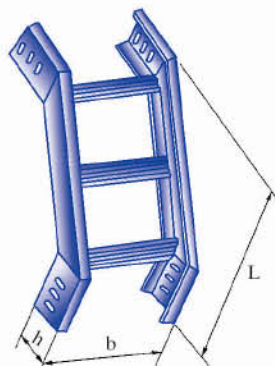


序号No.	型号 Model	b (mm)	h (mm)	L (mm)	重量 kg Weight
1	T-05A. B-6-2	200	60	360	5.32
2	T-05A. B-10-2		100	400	6.12
3	T-05A. B-15-2		150	550	12.01
4	T-05A. B-6-3	300	60	360	5.69
5	T-05A. B-10-3		100	400	6.88
6	T-05A. B-15-3		150	550	13.39
7	T-05A. B-6-4	400	60	360	5.90
8	T-05A. B-10-4		100	400	7.76
9	T-05A. B-15-4		150	550	15.06
10	T-05A. B-20-4	200	600	24.67	
11	T-05A. B-6-5	500	60	360	6.44
12	T-05A. B-10-5		100	400	8.30
13	T-05A. B-15-5		150	550	15.62
14	T-05A. B-20-5	200	600	25.21	
15	T-05A. B-6-6	600	60	360	8.87
16	T-05A. B-10-6		100	400	9.68
17	T-05A. B-15-6		150	550	16.16
18	T-05A. B-20-6	200	600	25.73	
19	T-05A. B-6-8	800	60	360	8.12
20	T-05A. B-10-8		100	400	9.98
21	T-05A. B-15-8		150	550	17.29
22	T-05A. B-20-8	200	600	26.88	

说明: 高度h=60、100为单排连接孔, 高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes

## XQJ-T1-05C 型垂直转动弯通

Model XQJ-T1-05C Vertical rotatable bend

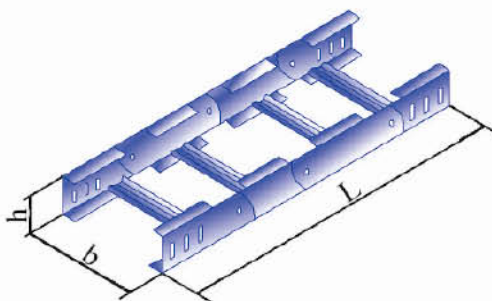


序号No.	型号 Model	b (mm)	h (mm)	L (mm)	重量 kg Weight
1	T1-05C-6-2	200	60	780	6.66
2	T1-05C-10-2		100	900	9.37
3	T1-05C-15-2		150	1050	19.77
4	T1-05C-6-3	300	60	780	8.52
5	T1-05C-10-3		100	900	11.08
6	T1-05C-15-3		150	1050	18.59
7	T1-05C-6-4	400	60	780	7.41
8	T1-05C-10-4		100	900	11.20
9	T1-05C-15-4		150	1050	20.81
10	T1-05C-20-4	200	1200	31.72	
11	T1-05C-6-5	500	60	780	8.14
12	T1-05C-10-5		100	900	11.25
13	T1-05C-15-5		150	1050	21.49
14	T1-05C-20-5	200	1200	32.32	
15	T1-05C-6-6	600	60	780	12.31
16	T1-05C-10-6		100	900	15.32
17	T1-05C-15-6		150	1050	22.97
18	T1-05C-20-6	200	1200	33.76	
19	T1-05C-6-8	800	60	780	15.20
20	T1-05C-10-8		100	900	15.87
21	T1-05C-15-8		150	1050	23.52
22	T1-05C-20-8	200	1200	34.46	

说明: 高度h=60、100为单排连接孔, 高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes

# XQJ托盘式电缆桥架


托盘式桥架是石油、化工、电力、电视电讯等方面最广泛应用的理想敷设装置。它具有重量轻、载荷大、造型美观、结构简单、安装方便、散热透气性好等优点。既适用于动力电缆的安装，也适用于控制电缆的敷设。

Tray-type cable support systems are ideal cable laying devices most broadly applied in petroleum industry, chemical industry, power and light industries, television and telecommunication. It is featured by such advantages as small weight, great loading capacity, good-looking shape, simple structure, convenient erection, quick heat dissipation and fine permeability.

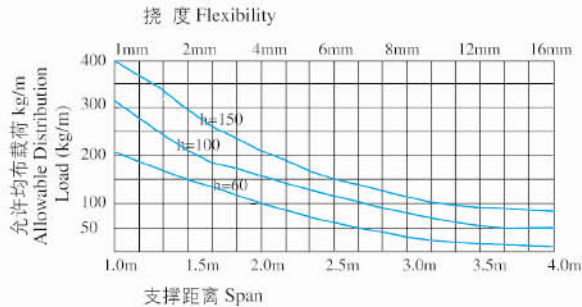


## XQJ-P-01 托盘式直通

XQJ-P-01 Tray type straight supply

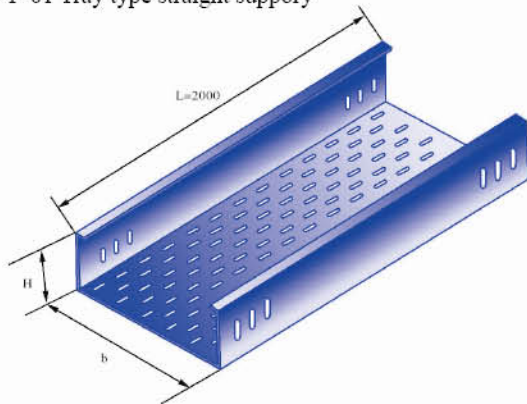


## XQJ-P-02 水平弯通

XQJ-P-02 Tray type horizontal bend

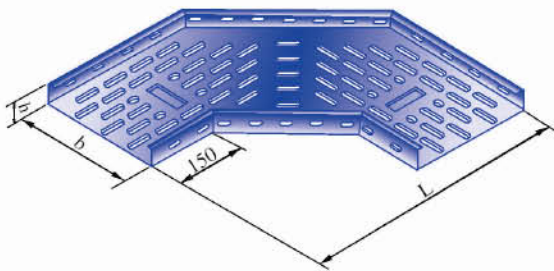

## XQJ-P-03 水平三通

XQJ-P-03 Tray type horizontal Tee

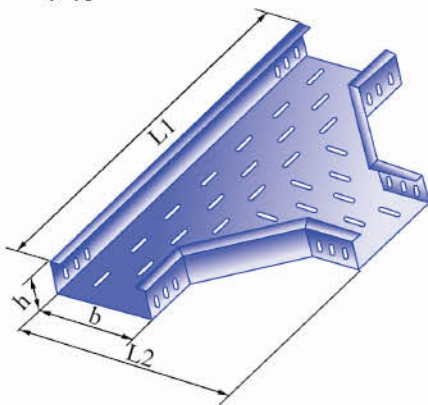

型号 Model	b (mm)	H (mm)	重量 kg Weight
P-01-6-2	200	60	17.65
P-01-10-2		100	25.14
P-01-15-2		150	32.80
P-01-20-2		200	35.78
P-01-6-3	300	60	29.54
P-01-10-3		100	32.11
P-01-15-3		150	38.65
P-01-20-3		200	40.99
P-01-6-4	400	60	43.60
P-01-10-4		100	49.63
P-01-15-4		150	56.67
P-01-20-4		200	58.88
P-01-6-5	500	60	54.99
P-01-10-5		100	56.67
P-01-15-5		150	63.93
P-01-20-5		200	65.39
P-01-6-6	600	60	62.83
P-01-10-6		100	63.95
P-01-15-6		150	71.17
P-01-20-6		200	76.99
P-01-6-8	800	60	72.56
P-01-10-8		100	78.46
P-01-15-8		150	90.09
P-01-20-8		200	95.54

说明：高度h=60、100为单排连接孔，高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes

型号 Model	b (mm)	h (mm)	L (mm)	重量 kg Weight
P-02-6-2	200	60	500	7.29
P-02-10-2		100		8.84
P-02-15-2		150		13.86
P-02-20-2		200		15.12
P-02-6-3	300	60	600	10.45
P-02-10-3		100		12.09
P-02-15-3		150		19.23
P-02-20-3		200		19.98
P-02-6-4	400	60	700	23.18
P-02-10-4		100		23.98
P-02-15-4		150		32.57
P-02-20-4		200		33.85
P-02-6-5	500	60	800	27.74
P-02-10-5		100		31.01
P-02-15-5		150		40.64
P-02-20-5		200		43.56
P-02-6-6	600	60	900	35.06
P-02-10-6		100		38.58
P-02-15-6		150		49.05
P-02-20-6		200		54.54
P-02-6-8	800	60	1100	46.05
P-02-10-8		100		51.48
P-02-15-8		150		69.54
P-02-20-8		200		75.97

说明：高度h=60、100为单排连接孔，高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes


型号 Model	b (mm)	h (mm)	L1 (mm)	L2 (mm)	重量 kg Weight
P-01-6-2	200	60	800	500	11.02
P-01-10-2		100			15.51
P-01-15-2		150			23.36
P-01-20-2		200			25.49
P-01-6-3	300	60	900	600	18.04
P-01-10-3		100			20.20
P-01-15-3		150			29.03
P-01-20-3		200			30.79
P-01-6-4	400	60	1000	700	28.97
P-01-10-4		100			32.13
P-01-15-4		150			45.93
P-01-20-4		200			47.71
P-01-6-5	500	60	1100	800	36.50
P-01-10-5		100			39.95
P-01-15-5		150			53.31
P-01-20-5		200			57.32
P-01-6-6	600	60	1200	900	44.52
P-01-10-6		100			48.15
P-01-15-6		150			65.34
P-01-20-6		200			69.56
P-01-6-8	800	60	1400	1100	63.33
P-01-10-8		100			66.95
P-01-15-8		150			77.32
P-01-20-8		200			81.68

说明：高度h=60、100为单排连接孔，高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes

# XQJ托盘式电缆桥架

## XQJ-P-04 水平四通

XQJ-P-04 Tray type horizontal Cross

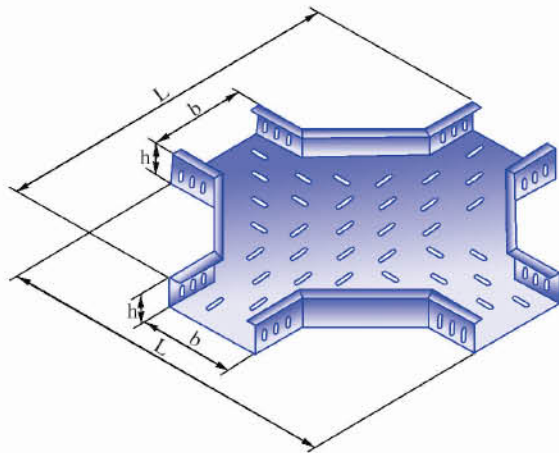


型号 Model	b (mm)	h (mm)	L (mm)	重量kg Weight
P-04-6-2	200	60	800	14.15
P-04-10-2		100		19.31
P-04-15-2		150		30.49
P-04-20-2		200		32.66
P-04-6-3	300	60	900	22.26
P-04-10-3		100		24.59
P-04-15-3		150		35.76
P-04-20-3		200		37.93
P-04-6-4	400	60	1000	33.02
P-04-10-4		100		37.85
P-04-15-4		150		55.51
P-04-20-4		200		57.67
P-04-6-5	500	60	1100	43.09
P-04-10-5		100		46.72
P-04-15-5		150		65.24
P-04-20-5		200		68.72
P-04-6-6	600	60	1200	51.93
P-04-10-6		100		55.33
P-04-15-6		150		75.93
P-04-20-6		200		68.70
P-04-6-8	800	60	1400	72.55
P-04-10-8		100		75.44
P-04-15-8		150		98.90
P-04-20-8		200		110.90

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes


## XQJ-P-05A 垂直凹弯通

XQJ-P-05A Ladder type straight convex bend



## XQJ-P-05B 垂直凸弯通

XQJ-P-05B Ladder type straight concave bend




型号 Model	b (mm)	h (mm)	L (mm)	重量kg Weight
P-05A, B-6-2	200	60	360	5.71
P-05A, B-10-2		100	400	8.39
P-05A, B-15-2		150	550	14.65
P-05A, B-20-2		200	600	17.22
P-05A, B-6-3	300	60	360	8.26
P-05A, B-10-3		100	400	10.10
P-05A, B-15-3		150	550	16.61
P-05A, B-20-3		200	600	18.90
P-05A, B-6-4	400	60	360	12.98
P-05A, B-10-4		100	400	15.65
P-05A, B-15-4		150	550	24.15
P-05A, B-20-4		200	600	26.28
P-05A, B-6-5	500	60	360	15.26
P-05A, B-10-5		100	400	17.99
P-05A, B-15-5		150	550	27.50
P-05A, B-20-5		200	600	29.64
P-05A, B-6-6	600	60	360	28.69
P-05A, B-10-6		100	400	31.49
P-05A, B-15-6		150	550	43.44
P-05A, B-20-6		200	600	45.69
P-05A, B-6-8	800	60	360	36.88
P-05A, B-10-8		100	400	40.01
P-05A, B-15-8		150	550	54.44
P-05A, B-20-8		200	600	58.20

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes

## XQJ-P-05C 垂直转动弯通

XQJ-P-05C Tray type straight rotatable bend

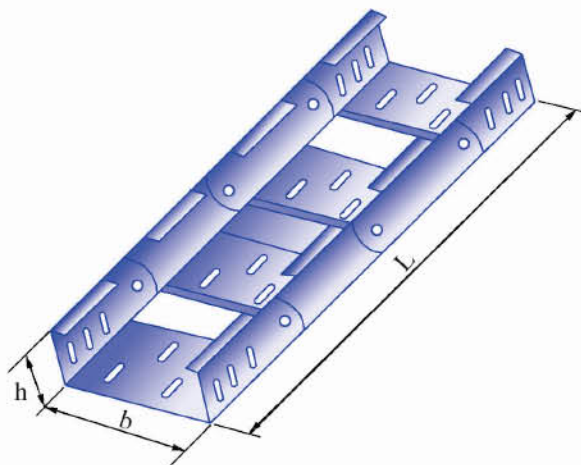


型号 Model	b (mm)	h (mm)	L (mm)	重量kg Weight
P-05C-6-2	200	60	780	7.07
P-05C-10-2		100	900	10.88
P-05C-15-2		150	1050	18.51
P-05C-20-2		200	1150	20.20
P-05C-6-3	300	60	780	9.08
P-05C-10-3		100	900	12.66
P-05C-15-3		150	1050	21.18
P-05C-20-3		200	1150	23.46
P-05C-6-4	400	60	780	19.27
P-05C-10-4		100	900	21.68
P-05C-15-4		150	1050	31.44
P-05C-20-4		200	1150	36.82
P-05C-6-5	500	60	780	21.91
P-05C-10-5		100	900	24.41
P-05C-15-5		150	1050	39.41
P-05C-20-5		200	1150	42.03
P-05C-6-6	600	60	780	24.41
P-05C-10-6		100	900	27.13
P-05C-15-6		150	1050	41.64
P-05C-20-6		200	1150	44.66
P-05C-6-8	800	60	780	29.52
P-05C-10-8		100	900	32.57
P-05C-15-8		150	1050	50.22
P-05C-20-8		200	1150	54.80

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes


# XQJ槽式电缆桥架

槽式电缆桥架是一种全封闭型电缆桥架。它是适用于敷设计算机、通信电缆、热电偶电缆及其它高灵敏系统的控制电缆等。它对控制电缆的屏蔽干扰和重腐蚀环境中电缆的防护都有较好的效果。  
The channel-type cable support system is a fully enclosed cable support system. It is applicable for laying computer cables, communication cables, thermocouple cables and control cables of highly-sensitive systems. It works well in resisting interference of control cable shield and protecting the cables in seriously corrosive environment.

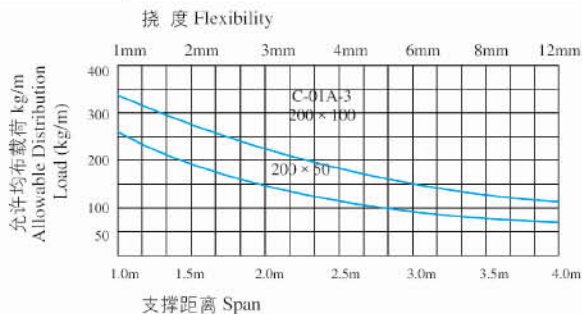


## XQJ-C-01A 槽式直通

XQJ-C-01A Straight-way trough-type

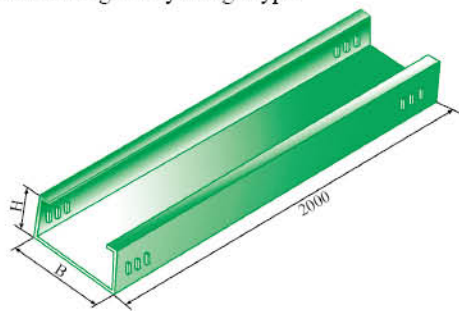


## XQJ-C-02A 水平弯通

XQJ-C-02A Horizontal Curved



## XQJ-C-03A 水平三通

XQJ-C-03A Horizontal 3-Way

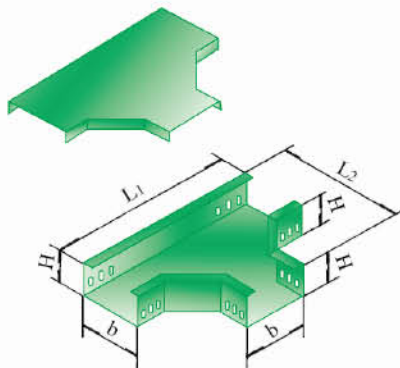

序号 No.	型号 Model	规格 Size	重量(槽体)kg Weight(Body)
1	C-01A-1	50×25	8.75
2	C-01A-2	100×50	14.44
3	C-01A-3	150×75	20.54
4	C-01A-4	200×100	31.15
5	C-01A-5	250×150	39.13
6	C-01A-6	300×100	36.40
7	C-01A-7	300×150	46.23
8	C-01A-8	400×100	50.77
9	C-01A-9	400×150	54.61
10	C-01A-10	400×200	65.53
11	C-01A-11	500×100	70.03
12	C-01A-12	500×150	73.17
13	C-01A-13	500×200	83.02
14	C-01A-14	600×100	79.40
15	C-01A-15	600×150	100.46
16	C-01A-16	600×200	109.36
17	C-01A-17	800×100	119.54
18	C-01A-18	800×150	125.90
19	C-01A-19	800×200	132.26

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

序号 No.	型号 Model	规格 Size	L (mm)	重量(槽体)kg Weight(Body)
1	C-02A-1	50×25	350	3.97
2	C-02A-2	100×50	400	6.85
3	C-02A-3	150×75	450	8.32
4	C-02A-4	200×100	500	12.45
5	C-02A-5	250×150	550	17.40
6	C-02A-6	300×100	600	20.81
7	C-02A-7	300×150	600	24.37
8	C-02A-8	400×100	700	33.54
9	C-02A-9	400×150	700	40.86
10	C-02A-10	400×200	700	44.15
11	C-02A-11	500×100	800	46.78
12	C-02A-12	500×150	800	48.90
13	C-02A-13	500×200	800	53.30
14	C-02A-14	600×100	900	58.60
15	C-02A-15	600×150	900	65.80
16	C-02A-16	600×200	1000	73.91
17	C-02A-17	800×100	1100	80.23
18	C-02A-18	800×150	1100	89.80
19	C-02A-19	800×200	1200	110.24


说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

序号 No.	型号 Model	规格 Size	L (mm)		重量(槽体)kg Weight(Body)
			L <sub>1</sub>	L <sub>2</sub>	
1	C-03A-1	50×25	650	350	3.98
2	C-03A-2	100×50	700	400	7.96
3	C-03A-3	150×75	750	450	9.34
4	C-03A-4	200×100	800	500	14.26
5	C-03A-5	250×150	850	550	19.44
6	C-03A-6	300×100	900	600	24.68
7	C-03A-7	300×150	900	600	28.07
8	C-03A-8	400×100	1000	700	38.28
9	C-03A-9	400×150	1000	700	49.53
10	C-03A-10	400×200	1200	800	54.11
11	C-03A-11	500×100	1100	800	59.24
12	C-03A-12	500×150	1100	800	62.51
13	C-03A-13	500×200	1300	900	66.03
14	C-03A-14	600×100	1200	900	68.13
15	C-03A-15	600×150	1200	900	72.56
16	C-03A-16	600×200	1200	1000	83.72
17	C-03A-17	800×100	1400	1100	85.68
18	C-03A-18	800×150	1400	1100	93.56
19	C-03A-19	800×200	1600	1200	118.60

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

# XQJ槽式电缆桥架


XQJ-C-03B 上垂直等径三通  
XQJ-C-03B Vertical equal sectional Tee

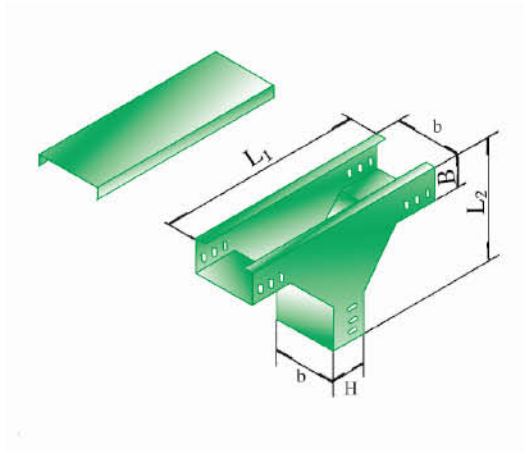

序号 No.	型号 Model	规格 Size	L (mm)		重量(槽体) Weight(Body)
			L <sub>1</sub>	L <sub>2</sub>	
1	C-03B-1	50×25	625	325	2.82
2	C-03B-2	100×50	650	350	5.23
3	C-03B-3	150×75	675	375	8.34
4	C-03B-4	200×100	700	400	13.84
5	C-03B-5	250×150	725	450	16.91
6	C-03B-6	300×100	700	400	18.68
7	C-03B-7	300×150	750	450	27.69
8	C-03B-8	400×100	700	400	28.84
9	C-03B-9	400×150	750	450	34.16
10	C-03B-10	400×200	1000	600	46.84
11	C-03B-11	500×100	700	400	48.12
12	C-03B-12	500×150	750	450	50.08
13	C-03B-13	500×200	1000	600	51.62
14	C-03B-14	600×100	700	400	52.86
15	C-03B-15	600×150	750	450	55.07
16	C-03B-16	600×200	1000	600	59.59
17	C-03B-17	800×100	700	400	60.82
18	C-03B-18	800×150	750	450	64.68
19	C-03B-19	800×200	1000	600	76.64

说明：高度h=60、100为单排连接孔，高h=150为双排连接孔。  
Description:h=60, single-row connection holes;h=150,double-row connection holes


XQJ-C-03C 下垂直等径三通  
XQJ-C-03C Downward vertical equal sectional Tee

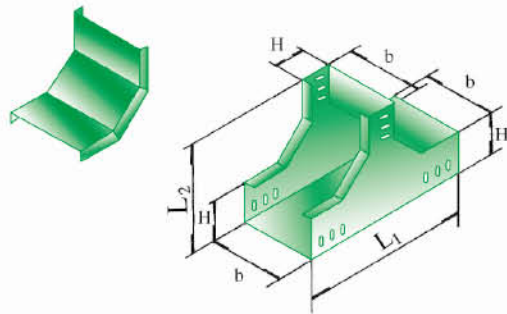

序号 No.	型号 Model	规格 Size	L (mm)		重量(槽体) Weight(Body)
			L <sub>1</sub>	L <sub>2</sub>	
1	C-03C-1	50×25	625	325	3.21
2	C-03C-2	100×50	650	350	5.73
3	C-03C-3	150×75	675	375	8.28
4	C-03C-4	200×100	700	400	13.95
5	C-03C-5	250×150	725	450	17.09
6	C-03C-6	300×100	700	400	19.18
7	C-03C-7	300×150	750	450	27.93
8	C-03C-8	400×100	700	400	29.24
9	C-03C-9	400×150	750	450	35.24
10	C-03C-10	400×200	1000	600	48.38
11	C-03C-11	500×100	700	400	49.73
12	C-03C-12	500×150	750	450	50.81
13	C-03C-13	500×200	1000	600	53.79
14	C-03C-14	600×100	700	400	54.48
15	C-03C-15	600×150	750	450	56.54
16	C-03C-16	600×200	1000	600	65.38
17	C-03C-17	800×100	700	400	67.82
18	C-03C-18	800×150	750	450	69.09
19	C-03C-19	800×200	1000	600	79.35

说明：高度h=60、100为单排连接孔，高h=150为双排连接孔。  
Description:h=60, single-row connection holes;h=150,double-row connection holes

XQJ-C-03D 上边垂直等径三通  
XQJ-C-03D Upward side vertical equal sectional Tee

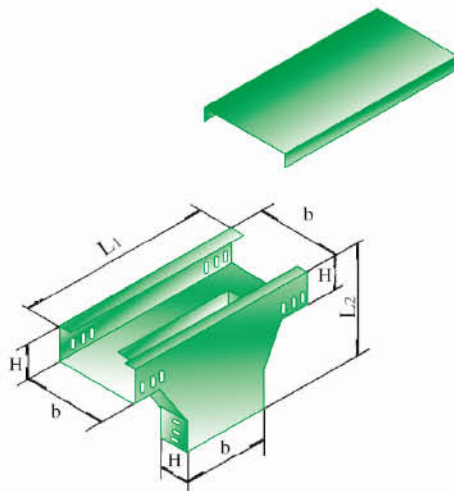


序号 No.	型号 Model	规格 Size	L (mm)		重量(槽体) Weight(Body)
			L <sub>1</sub>	L <sub>2</sub>	
1	C-03D-1	50×25	650	325	2.83
2	C-03D-2	100×50	700	350	6.05
3	C-03D-3	150×75	750	375	8.33
4	C-03D-4	200×100	800	400	14.67
5	C-03D-5	250×150	850	450	18.06
6	C-03D-6	300×100	900	400	20.20
7	C-03D-7	300×150	900	450	28.31
8	C-03D-8	400×100	1000	400	33.80
9	C-03D-9	400×150	1000	450	42.50
10	C-03D-10	400×200	1200	600	50.88
11	C-03D-11	500×100	1100	400	52.30
12	C-03D-12	500×150	1100	450	54.80
13	C-03D-13	500×200	1300	600	58.90
14	C-03D-14	600×100	1200	400	60.10
15	C-03D-15	600×150	1200	450	63.40
16	C-03D-16	600×200	1400	600	68.37
17	C-03D-17	800×100	1400	400	69.50
18	C-03D-18	800×150	1400	450	76.30
19	C-03D-19	800×200	1600	600	94.29

说明：高度h=60、100为单排连接孔，高h=150为双排连接孔。  
Description:h=60, single-row connection holes;h=150,double-row connection holes

# XQJ槽式电缆桥架

## XQJ-C-03E 下边垂直等径三通

XQJ-C-03E Downward side vertical equal sectional Tee

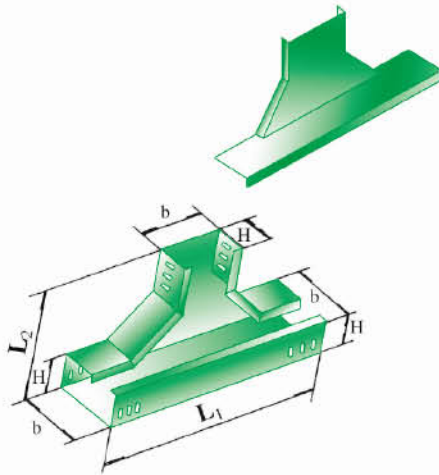


序号 No.	型号 Model	规格 Size	L (mm)		重量(槽体) Weight(Body)
			L <sub>1</sub>	L <sub>2</sub>	
1	C-03E-1	50×25	650	325	3.29
2	C-03E-2	100×50	700	350	6.14
3	C-03E-3	150×75	750	375	8.91
4	C-03E-4	200×100	800	400	15.31
5	C-03E-5	250×150	850	450	19.48
6	C-03E-6	300×100	900	400	22.30
7	C-03E-7	300×150	900	450	31.22
8	C-03E-8	400×100	1000	400	35.20
9	C-03E-9	400×150	1000	450	42.50
10	C-03E-10	400×200	1200	600	62.53
11	C-03E-11	500×100	1100	400	63.40
12	C-03E-12	500×150	1100	450	64.50
13	C-03E-13	500×200	1300	600	68.75
14	C-03E-14	600×100	1200	400	70.80
15	C-03E-15	600×150	1200	450	73.40
16	C-03E-16	600×200	1400	600	84.05
17	C-03E-17	800×100	1400	400	85.30
18	C-03E-18	800×150	1400	450	92.20
19	C-03E-19	800×200	1600	600	110.96

说明：高度h=60，100为单排连接孔，高h=150为双排连接孔。  
Description:h=60, single-row connection holes;h=150,double-row connection holes

## XQJ-C-03F 上角垂直等径三通

XQJ-C-03F Upward corner vertical equal sectional Tee

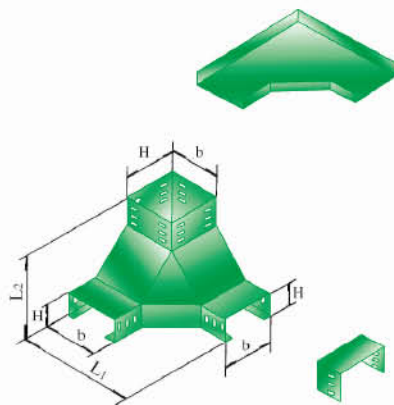


序号 No.	型号 Model	规格 Size	L (mm)		重量(槽体) Weight(Body)
			L <sub>1</sub>	L <sub>2</sub>	
1	C-03F-1	50×25	350	325	3.07
2	C-03F-2	100×50	400	350	6.36
3	C-03F-3	150×75	450	375	9.92
4	C-03F-4	200×100	500	400	14.78
5	C-03F-5	250×150	550	450	19.34
6	C-03F-6	300×100	600	400	28.65
7	C-03F-7	300×150	600	450	36.40
8	C-03F-8	400×100	700	400	45.23
9	C-03F-9	400×150	700	450	50.18
10	C-03F-10	400×200	800	600	60.42
11	C-03F-11	500×100	800	400	61.59
12	C-03F-12	500×150	800	450	68.15
13	C-03F-13	500×200	900	600	75.08
14	C-03F-14	600×100	900	400	76.87
15	C-03F-15	600×150	900	450	82.36
16	C-03F-16	600×200	1000	600	97.96
17	C-03F-17	800×100	1100	400	100.18
18	C-03F-18	800×150	1100	450	110.25
19	C-03F-19	800×200	1200	600	136.90

说明：高度h=60，100为单排连接孔，高h=150为双排连接孔。  
Description:h=60, single-row connection holes;h=150,double-row connection holes

## XQJ-C-03G 下角垂直等径三通

XQJ-C-03G Downward corner vertical equal sectional Tee

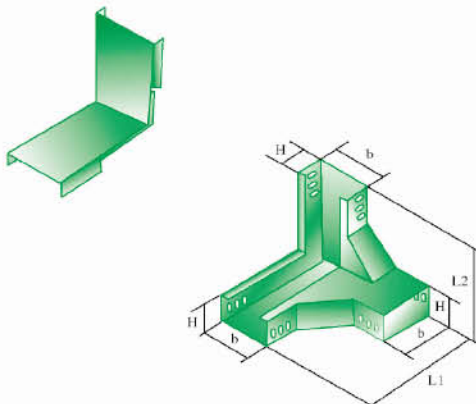


序号 No.	型号 Model	规格 Size	L (mm)		重量(槽体) Weight(Body)
			L <sub>1</sub>	L <sub>2</sub>	
1	C-03G-1	50×25	350	325	2.95
2	C-03G-2	100×50	400	350	6.51
3	C-03G-3	150×75	450	375	9.06
4	C-03G-4	200×100	500	400	15.88
5	C-03G-5	250×150	550	450	19.97
6	C-03G-6	300×100	600	400	21.95
7	C-03G-7	300×150	600	450	31.80
8	C-03G-8	400×100	700	400	36.79
9	C-03G-9	400×150	700	450	45.63
10	C-03G-10	400×200	800	600	57.69
11	C-03G-11	500×100	800	400	58.45
12	C-03G-12	500×150	800	450	60.82
13	C-03G-13	500×200	900	600	66.42
14	C-03G-14	600×100	900	400	68.95
15	C-03G-15	600×150	900	450	70.83
16	C-03G-16	600×200	1000	600	85.00
17	C-03G-17	800×100	1100	400	88.21
18	C-03G-18	800×150	1100	450	90.87
19	C-03G-19	800×200	1200	600	116.50

说明：高度h=60，100为单排连接孔，高h=150为双排连接孔。  
Description:h=60, single-row connection holes;h=150,double-row connection holes

# XQJ槽式电缆桥架


XQJ-C-04A 水平四通  
XQJ-C-04A Horizontal 4-Way

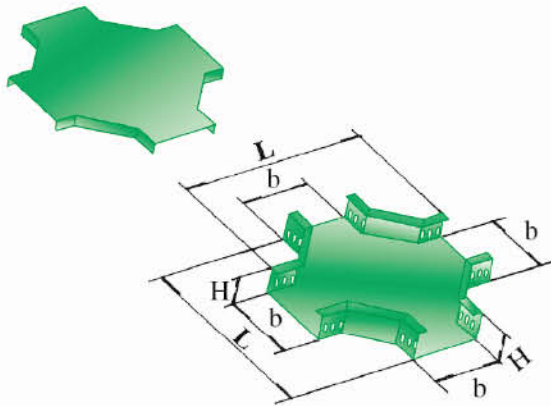

序号 No.	型号 Model	规格 Size	L (mm)	重量(槽体) Weight(Body)
1	C-04A-1	50×25	650	4.52
2	C-04A-2	100×50	700	8.78
3	C-04A-3	150×75	750	10.22
4	C-04A-4	200×100	800	18.77
5	C-04A-5	250×150	850	24.00
6	C-04A-6	300×100	900	28.76
7	C-04A-7	300×150	900	34.24
8	C-04A-8	400×100	1000	46.32
9	C-04A-9	400×150	1000	58.54
10	C-04A-10	400×200	1200	65.01
11	C-04A-11	500×100	1100	68.97
12	C-04A-12	500×150	1100	72.79
13	C-04A-13	500×200	1300	78.22
14	C-04A-14	600×100	1200	80.28
15	C-04A-15	600×150	1200	83.96
16	C-04A-16	600×200	1400	98.48
17	C-04A-17	800×100	1400	100.26
18	C-04A-18	800×150	1400	112.09
19	C-04A-19	800×200	1600	136.60

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes


XQJ-C-04B 上垂直等径四通  
XQJ-C-04B Vertical equal sectional Tee

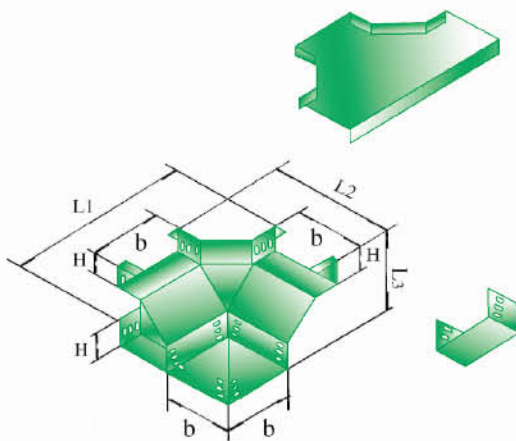

序号 No.	型号 Model	规格 Size	L (mm)			重量(槽体) Weight(Body)
			L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	
1	C-04B-1	50×25	650	350	325	3.48
2	C-04B-2	100×50	700	400	350	7.89
3	C-04B-3	150×75	750	450	375	11.38
4	C-04B-4	200×100	800	500	400	19.42
5	C-04B-5	250×150	850	550	450	22.49
6	C-04B-6	300×100	900	600	400	24.21
7	C-04B-7	300×150	900	600	450	39.04
8	C-04B-8	400×100	1000	700	400	39.87
9	C-04B-9	400×150	1000	700	450	50.09
10	C-04B-10	400×200	1200	800	600	69.79
11	C-04B-11	500×100	1100	800	400	72.52
12	C-04B-12	500×150	1100	800	450	80.23
13	C-04B-13	500×200	1300	900	600	86.15
14	C-04B-14	600×100	1200	900	400	88.28
15	C-04B-15	600×150	1200	900	450	90.36
16	C-04B-16	600×200	1400	1100	600	97.69
17	C-04B-17	800×100	1400	1100	400	100.26
18	C-04B-18	800×150	1400	1100	450	115.84
19	C-04B-19	800×200	1600	1200	600	138.79

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes

XQJ-C-05A 垂直等径上弯通  
XQJ-C-05A Vertical equal sectional upward bend

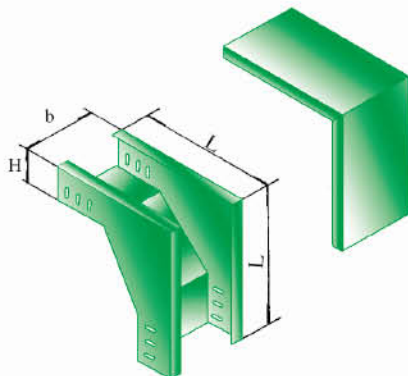


序号 No.	型号 Model	规格 Size	L (mm)	重量(槽体) Weight(Body)
1	C-05A-1	50×25	325	2.87
2	C-05A-2	100×50	350	4.33
3	C-05A-3	150×75	375	6.18
4	C-05A-4	200×100	400	9.54
5	C-05A-5	250×150	450	11.83
6	C-05A-6	300×100	400	15.68
7	C-05A-7	300×150	450	20.39
8	C-05A-8	400×100	400	21.98
9	C-05A-9	400×150	450	28.34
10	C-05A-10	400×200	600	33.35
11	C-05A-11	500×100	400	35.68
12	C-05A-12	500×150	450	37.26
13	C-05A-13	500×200	600	43.29
14	C-05A-14	600×100	400	45.68
15	C-05A-15	600×150	450	48.16
16	C-05A-16	600×200	600	52.49
17	C-05A-17	800×100	400	53.62
18	C-05A-18	800×150	450	55.68
19	C-05A-19	800×200	600	64.38

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes

# XQJ槽式电缆桥架

## XQJ-C-05B 垂直等径下弯通

XQJ-C-05B Vertical equal sectional downward bend

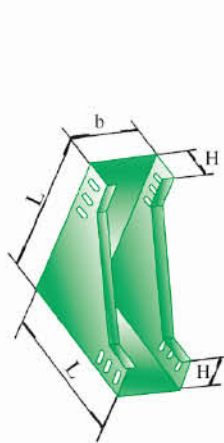


序号 No.	型号 Model	规格 Size	L (mm)	重量(槽体) Weight(Body)
1	C-05B-1	50×25	325	3.05
2	C-05B-2	100×50	350	4.63
3	C-05B-3	150×75	375	6.32
4	C-05B-4	200×100	400	9.87
5	C-05B-5	250×150	450	12.13
6	C-05B-6	300×100	400	16.20
7	C-05B-7	300×150	450	22.80
8	C-05B-8	400×100	400	22.40
9	C-05B-9	400×150	450	31.50
10	C-05B-10	400×200	600	43.77
11	C-05B-11	500×100	400	44.61
12	C-05B-12	500×150	450	45.12
13	C-05B-13	500×200	600	48.54
14	C-05B-14	600×100	400	49.97
15	C-05B-15	600×150	450	52.89
16	C-05B-16	600×200	600	57.28
17	C-05B-17	800×100	400	57.85
18	C-05B-18	800×150	450	60.82
19	C-05B-19	800×200	600	75.56

说明：高度h=60，100为单排连接孔，高h=150为双排连接孔。  
Description:h=60, single-row connection holes;h=150,double-row connection holes

## XQJ-C-05C 垂直等径左上弯通

XQJ-C-05C Vertical equal sectional left upward bend

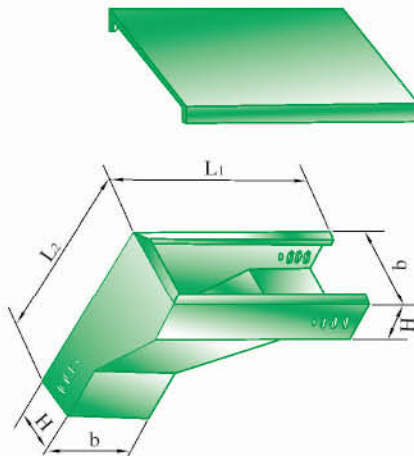


序号 No.	型号 Model	规格 Size	L (mm)		重量(槽体) Weight(Body)
			L <sub>1</sub>	L <sub>2</sub>	
1	C-05C-1	50×25	350	325	2.86
2	C-05C-2	100×50	400	350	4.99
3	C-05C-3	150×75	450	375	7.06
4	C-05C-4	200×100	500	400	11.90
5	C-05C-5	250×150	550	450	15.35
6	C-05C-6	300×100	600	400	18.68
7	C-05C-7	300×150	600	450	22.56
8	C-05C-8	400×100	700	400	32.50
9	C-05C-9	400×150	700	450	37.20
10	C-05C-10	400×200	800	600	43.28
11	C-05C-11	500×100	800	400	44.80
12	C-05C-12	500×150	800	450	46.20
13	C-05C-13	500×200	900	600	52.31
14	C-05C-14	600×100	900	400	53.80
15	C-05C-15	600×150	900	450	58.20
16	C-05C-16	600×200	1000	600	68.60
17	C-05C-17	800×100	1100	400	70.20
18	C-05C-18	800×150	1100	450	81.50
19	C-05C-19	800×200	1200	600	102.75

说明：高度h=60，100为单排连接孔，高h=150为双排连接孔。  
Description:h=60, single-row connection holes;h=150,double-row connection holes

## XQJ-C-05D 垂直等径左下弯通

XQJ-C-05D Vertical equal sectional left downward bend

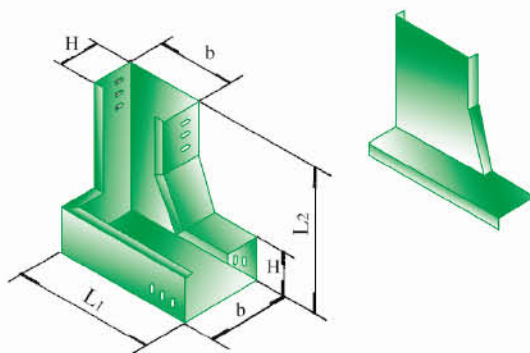


序号 No.	型号 Model	规格 Size	L (mm)		重量(槽体) Weight(Body)
			L <sub>1</sub>	L <sub>2</sub>	
1	C-05D-1	50×25	350	325	2.83
2	C-05D-2	100×50	400	350	4.94
3	C-05D-3	150×75	450	375	7.02
4	C-05D-4	200×100	500	400	11.08
5	C-05D-5	250×150	550	450	14.99
6	C-05D-6	300×100	600	400	20.68
7	C-05D-7	300×150	600	450	26.20
8	C-05D-8	400×100	700	400	32.89
9	C-05D-9	400×150	700	450	40.56
10	C-05D-10	400×200	800	600	46.37
11	C-05D-11	500×100	800	400	47.88
12	C-05D-12	500×150	800	450	50.12
13	C-05D-13	500×200	900	600	56.64
14	C-05D-14	600×100	900	400	58.24
15	C-05D-15	600×150	900	450	60.13
16	C-05D-16	600×200	1000	600	72.50
17	C-05D-17	800×100	1100	400	75.45
18	C-05D-18	800×150	1100	450	86.89
19	C-05D-19	800×200	1200	600	104.16


说明：高度h=60，100为单排连接孔，高h=150为双排连接孔。  
Description:h=60, single-row connection holes;h=150,double-row connection holes

# XQJ槽式电缆桥架


XQJ-C-05E 垂直等径右上弯通  
XQJ-C-05E Vertical equal sectional right upward bend

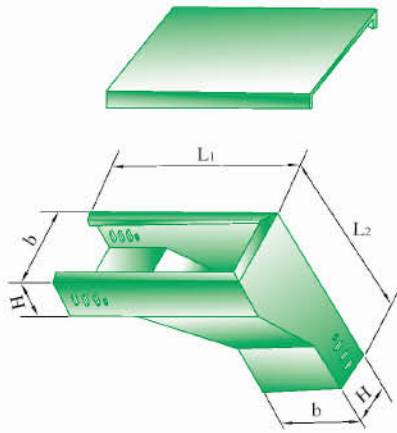

XQJ-C-05F 垂直等径右下弯通  
XQJ-C-05F Vertical equal sectional right downward bend

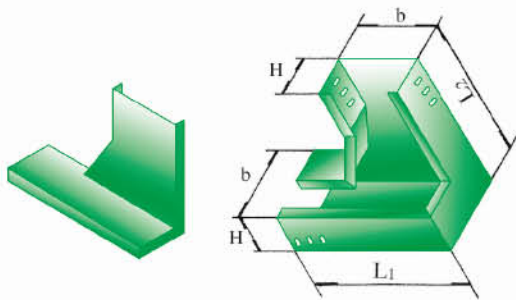

XQJ-C-06A、B、C、D异径接头  
XQJ-C-06A、B、C、D model Reducer

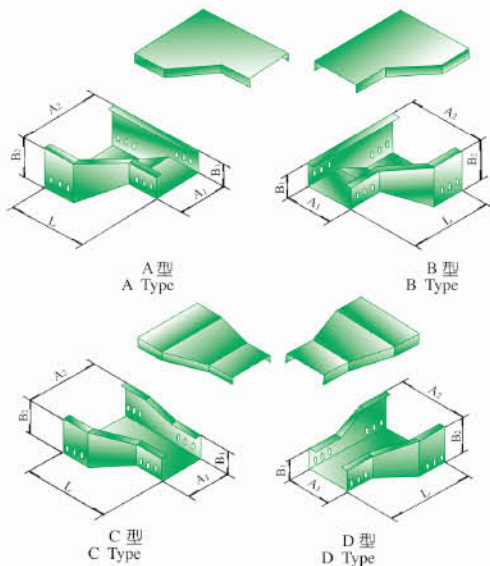

序号 No.	型号 Model	规格 Size	L (mm)		重量(槽体) Weight(Body)
			L <sub>1</sub>	L <sub>2</sub>	
1	C-05E-1	50×25	350	325	2.86
2	C-05E-2	100×50	400	350	4.99
3	C-05E-3	150×75	450	375	7.06
4	C-05E-4	200×100	500	400	11.90
5	C-05E-5	250×150	550	450	15.35
6	C-05E-6	300×100	600	400	18.68
7	C-05E-7	300×150	600	450	22.56
8	C-05E-8	400×100	700	400	32.50
9	C-05E-9	400×150	700	450	37.20
10	C-05E-10	400×200	800	600	43.28
11	C-05E-11	500×100	800	400	44.80
12	C-05E-12	500×150	800	450	46.20
13	C-05E-13	500×200	900	600	52.31
14	C-05E-14	600×100	900	400	53.80
15	C-05E-15	600×150	900	450	58.20
16	C-05E-16	600×200	1000	600	68.60
17	C-05E-17	800×100	1100	400	70.20
18	C-05E-18	800×150	1100	450	81.50
19	C-05E-19	800×200	1200	600	102.75

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes


序号 No.	型号 Model	规格 Size	L (mm)		重量(槽体) Weight(Body)
			L <sub>1</sub>	L <sub>2</sub>	
1	C-05F-1	50×25	350	325	2.83
2	C-05F-2	100×50	400	350	4.94
3	C-05F-3	150×75	450	375	7.02
4	C-05F-4	200×100	500	400	11.08
5	C-05F-5	250×150	550	450	14.99
6	C-05F-6	300×100	600	400	20.68
7	C-05F-7	300×150	600	450	26.20
8	C-05F-8	400×100	700	400	32.89
9	C-05F-9	400×150	700	450	40.56
10	C-05F-10	400×200	800	600	46.37
11	C-05F-11	500×100	800	400	47.88
12	C-05F-12	500×150	800	450	50.12
13	C-05F-13	500×200	900	600	56.64
14	C-05F-14	600×100	900	400	58.24
15	C-05F-15	600×150	900	450	60.13
16	C-05F-16	600×200	1000	600	72.50
17	C-05F-17	800×100	1100	400	75.45
18	C-05F-18	800×150	1100	450	86.89
19	C-05F-19	800×200	1200	600	104.16

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes

型号 Model	序号 No.	规格Size A1×B1-A2×B2	重量kg		序号 No.	规格Size A1×B1-A2×B2	重量kg	
			槽体 Body	护罩 Cover			槽体 Body	护罩 Cover
C-06A	1	50×25-100×50	1.16	0.52	24	150×75-800×200	35.55	18.95
	2	50×25-150×75	1.83	0.68	25	200×100-250×125	4.20	1.38
	3	50×25-200×100	3.26	1.32	26	200×100-300×150	7.42	2.35
	4	50×25-250×125	4.08	1.63	27	200×100-400×200	14.27	5.69
	5	50×25-300×150	7.85	2.41	28	200×100-500×200	18.73	6.87
	6	50×25-400×200	14.76	5.58	29	200×100-600×200	23.70	12.30
	7	50×25-500×200	19.00	7.69	30	200×100-800×200	35.15	15.60
	8	50×25-600×200	24.01	10.58	31	250×125-300×150	6.85	2.30
	9	50×25-800×200	36.68	15.61	32	250×125-400×200	13.58	3.85
C-06B	10	100×50-150×75	2.03	0.89	33	250×125-500×200	18.14	5.96
	11	100×50-200×100	3.50	1.21	34	250×125-600×200	23.44	15.18
	12	100×50-250×125	4.34	2.12	35	250×125-800×200	34.94	16.82
C-06C	13	100×50-300×150	8.05	3.13	36	300×150-400×200	15.20	5.64
	14	100×50-400×200	15.08	10.18	37	300×150-500×200	19.87	7.81
	15	100×50-500×200	19.39	12.13	38	300×150-600×200	25.00	10.89
C-06D	16	100×50-600×200	24.21	13.80	39	300×150-800×200	35.49	12.93
	17	100×50-800×200	35.38	15.69	40	400×200-500×200	39.03	16.61
	18	150×75-200×100	3.28	0.88	41	400×200-600×200	50.58	25.13
	19	150×75-250×125	4.47	1.68	42	400×200-800×200	65.22	26.81
	20	150×75-300×150	7.85	2.38	43	500×200-600×200	44.31	22.38
	21	150×75-400×200	14.83	7.80	44	500×200-800×200	70.53	30.88
	22	150×75-500×200	19.26	8.89	45	600×200-800×200	63.00	28.80
	23	150×75-600×250	24.12	11.36				

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔。  
Description: h=60, single-row connection holes; h=150, double-row connection holes


# DJ大跨距电缆桥架



A型槽 载荷/挠度曲线图


## DJ-T-A 型梯级式大跨距汇线桥架

DJ-T-A Type Stair Large-span Bridge Frame

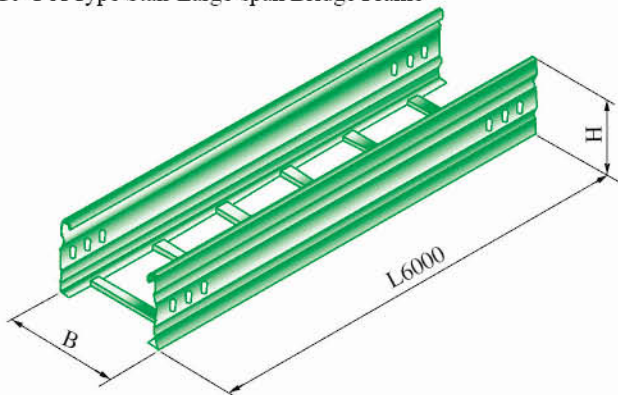


## DJ-T-B 型梯级式大跨距汇线桥架

DJ-T-B Type Stair Large-span Bridge Frame

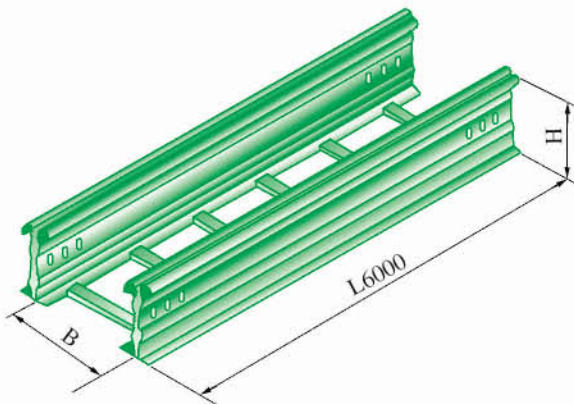

## DJ-P-A型托盘式大跨距汇线桥架

DJ-P-A Type Stair Large-span Bridge Frame

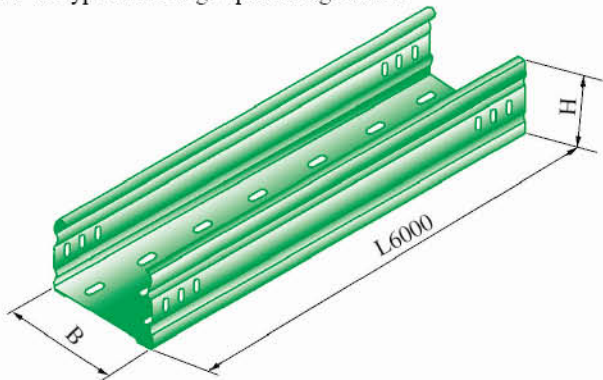

大跨距桥架分梯级式、槽式、托盘式三种形式。A型、B型二种型号。支撑间距6m。当跨距大于6m时可接受特殊订货。

Large-span cable support-systems consist of 3 types, i.e. ladder type, channel type and tray type. They are of 2 models, namely Model A and Model B with the span between the supports being 6m, Special order will be accepted when the span exceeds 6m.

型号 Model	H (mm)	B (mm)	重量kg Weight
DJ-T-A-10-2	100	200	46.86
DJ-T-A-10-3		300	48.21
DJ-T-A-10-4		400	71.18
DJ-T-A-10-5		500	77.72
DJ-T-A-10-6		600	84.25
DJ-T-A-10-8		800	88.53
DJ-T-A-15-2	150	200	64.60
DJ-T-A-15-3		300	72.90
DJ-T-A-15-4		400	86.77
DJ-T-A-15-5		500	93.26
DJ-T-A-15-6		600	99.79
DJ-T-A-15-8		800	106.66
DJ-T-A-20-2	200	200	85.58
DJ-T-A-20-3		300	88.84
DJ-T-A-20-4		400	99.00
DJ-T-A-20-5		500	106.00
DJ-T-A-20-6		600	113.40
DJ-T-A-20-8		800	133.32

说明：高度h=100为单排连接孔，高h=150为双排连接孔。  
Description: h=100, single-row connection holes; h=150, double-row connection holes


型号 Model	H (mm)	B (mm)	重量kg Weight
DJ-T-B-10-2	100	200	106.39
DJ-T-B-10-3		300	109.93
DJ-T-B-10-4		400	122.36
DJ-T-B-10-5		500	128.90
DJ-T-B-10-6		600	135.43
DJ-T-B-10-8		800	145.15
DJ-T-B-15-2	150	200	127.98
DJ-T-B-15-3		300	158.09
DJ-T-B-15-4		400	177.43
DJ-T-B-15-5		500	186.90
DJ-T-B-15-6		600	196.38
DJ-T-B-15-8		800	206.10
DJ-T-B-20-2	200	200	172.20
DJ-T-B-20-3		300	179.65
DJ-T-B-20-4		400	201.42
DJ-T-B-20-5		500	212.38
DJ-T-B-20-6		600	223.16
DJ-T-B-20-8		800	233.93

说明：高度h=100为单排连接孔，高h=150为双排连接孔。  
Description: h=100, single-row connection holes; h=150, double-row connection holes

型号 Model	H (mm)	B (mm)	重量kg Weight
DJ-P-A-10-2	100	200	109.25
DJ-P-A-10-3		300	119.61
DJ-P-A-10-4		400	157.02
DJ-P-A-10-5		500	178.85
DJ-P-A-10-6		600	200.56
DJ-P-A-10-8		800	222.00
DJ-P-A-15-2	150	200	119.61
DJ-P-A-15-3		300	132.56
DJ-P-A-15-4		400	154.56
DJ-P-A-15-5		500	174.36
DJ-P-A-15-6		600	194.01
DJ-P-A-15-8		800	233.90
DJ-P-A-20-2	200	200	135.88
DJ-P-A-20-3		300	150.68
DJ-P-A-20-4		400	193.20
DJ-P-A-20-5		500	217.95
DJ-P-A-20-6		600	242.51
DJ-P-A-20-8		800	291.25


说明：高度h=100为单排连接孔，高h=150为双排连接孔。  
Description: h=100, single-row connection holes; h=150, double-row connection holes

# DJ大跨距电缆桥架

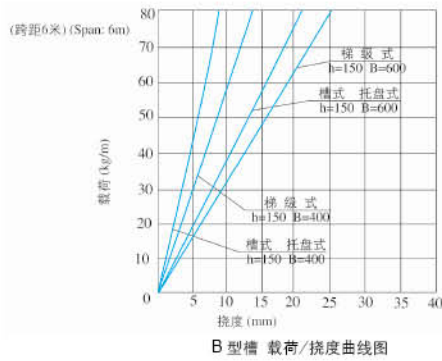


## DJ-P-B 型托盘式大跨距汇线桥架

DJ-P-B Type Stair Large-span Bridge Frame

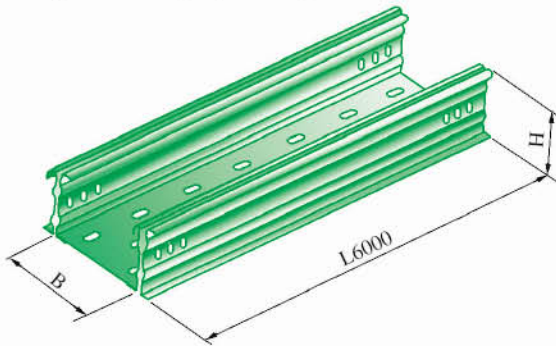


## DJ-C-A 型槽式大跨距汇线桥架

DJ-C-A Type Stair Large-span Bridge Frame

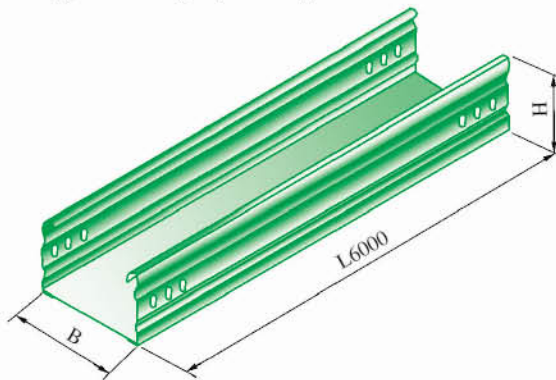

## DJ-C-B 型槽式大跨距汇线桥架

DJ-C-B Type Stair Large-span Bridge Frame

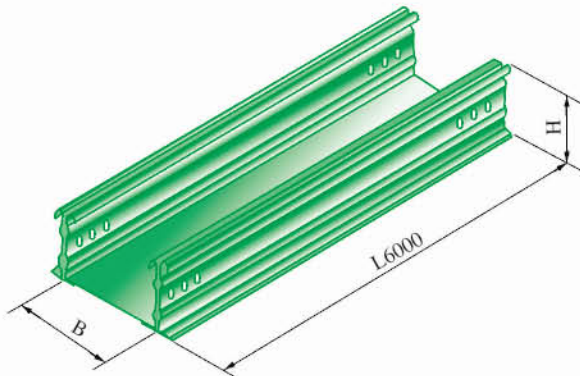

型号 Model	H (mm)	B (mm)	重量kg Weight	
DJ-P-B-10-2	100	200	134.05	
DJ-P-B-10-3		300	182.42	
DJ-P-B-10-4		400	205.66	
DJ-P-B-10-5		500	227.44	
DJ-P-B-10-6		600	249.15	
DJ-P-B-10-8		800	265.30	
DJ-P-B-15-2		150	200	181.11
DJ-P-B-15-3			300	219.90
DJ-P-B-15-4	400		271.10	
DJ-P-B-15-5	500		299.81	
DJ-P-B-15-6	600		328.43	
DJ-P-B-15-8	800		367.24	
DJ-P-B-20-2	200		200	225.72
DJ-P-B-20-3			300	249.88
DJ-P-B-20-4		400	338.75	
DJ-P-B-20-5		500	373.81	
DJ-P-B-20-6		600	410.17	
DJ-P-B-20-8		800	459.05	


说明：高度h=100为单排连接孔，高h=150为双排连接孔。  
Description: h=100, single-row connection holes; h=150, double-row connection holes

型号 Model	H (mm)	B (mm)	重量kg Weight	
DJ-C-A-10-2	100	200	98.96	
DJ-C-A-10-3		300	109.32	
DJ-C-A-10-4		400	164.24	
DJ-C-A-10-5		500	152.59	
DJ-C-A-10-6		600	203.68	
DJ-C-A-10-8		800	224.33	
DJ-C-A-15-2		150	200	106.93
DJ-C-A-15-3			300	122.43
DJ-C-A-15-4	400		172.86	
DJ-C-A-15-5	500		189.54	
DJ-C-A-15-6	600		228.71	
DJ-C-A-15-8	800		244.56	
DJ-C-A-20-2	200		200	133.66
DJ-C-A-20-3			300	153.66
DJ-C-A-20-4		400	216.07	
DJ-C-A-20-5		500	236.92	
DJ-C-A-20-6		600	260.12	
DJ-C-A-20-8		800	305.70	


说明：高度h=100为单排连接孔，高h=150为双排连接孔。  
Description: h=100, single-row connection holes; h=150, double-row connection holes

型号 Model	H (mm)	B (mm)	重量kg Weight
DJ-C-B-10-2	100	200	132.26
DJ-C-B-10-3		300	153.67
DJ-C-B-10-4		400	235.79
DJ-C-B-10-5		500	244.13
DJ-C-B-10-6		600	265.22
DJ-C-B-10-8		800	279.79
DJ-C-B-15-2	150	200	188.08
DJ-C-B-15-3		300	222.82
DJ-C-B-15-4		400	297.63
DJ-C-B-15-5		500	321.84
DJ-C-B-15-6		600	349.61
DJ-C-B-15-8		800	388.20
DJ-C-B-20-2	200	200	229.80
DJ-C-B-20-3		300	253.20
DJ-C-B-20-4		400	372.03
DJ-C-B-20-5		500	402.30
DJ-C-B-20-6		600	437.01
DJ-C-B-20-8		800	485.07


说明：高度h=100为单排连接孔，高h=150为双排连接孔。  
Description: h=100, single-row connection holes; h=150, double-row connection holes

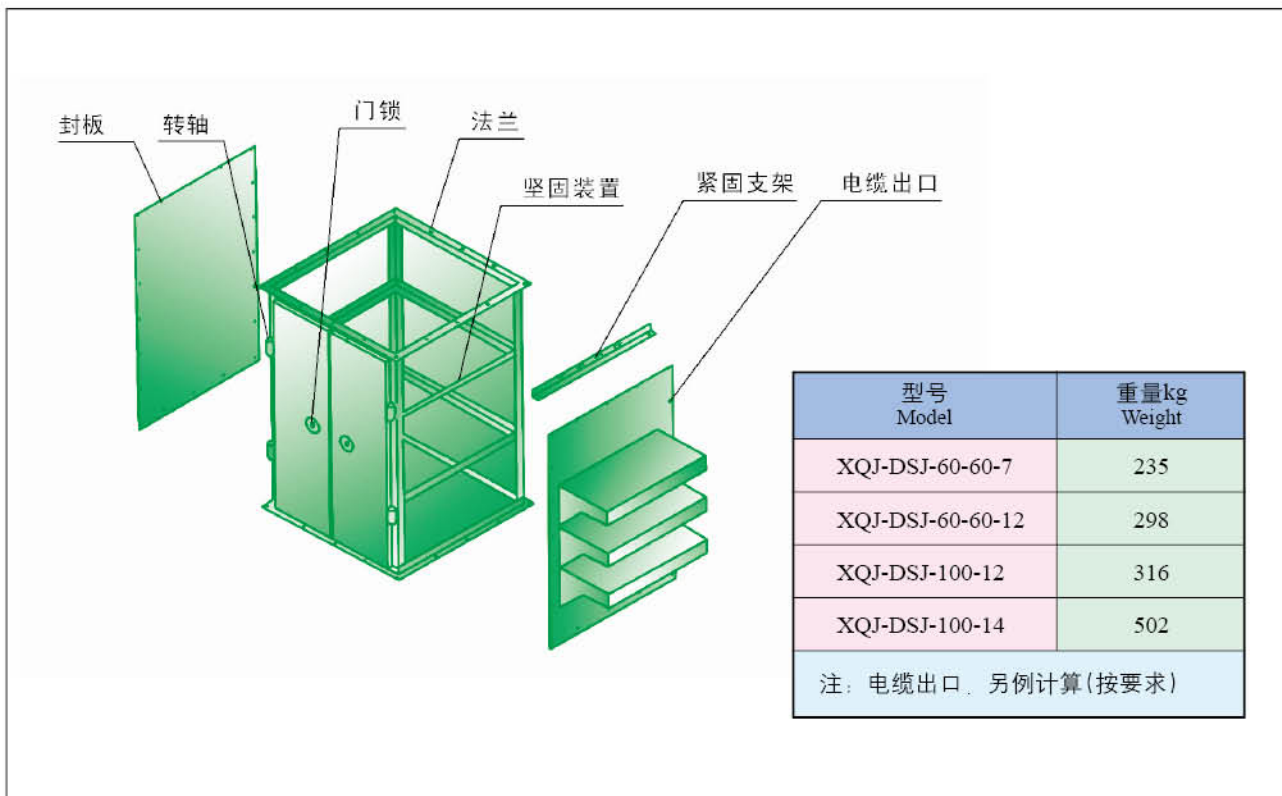

电缆竖井安装示意图 (一)  
Schematic diagram of mounting for shafts (I)

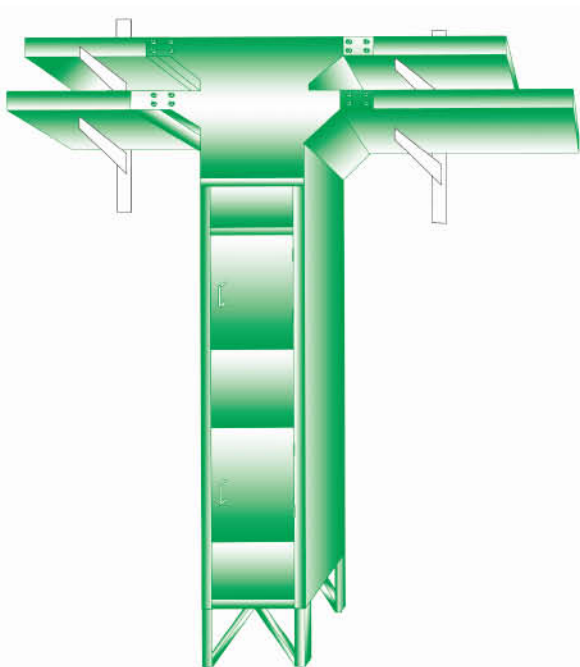


电缆竖井安装示意图 (二)  
Schematic diagram of mounting for shafts (II)

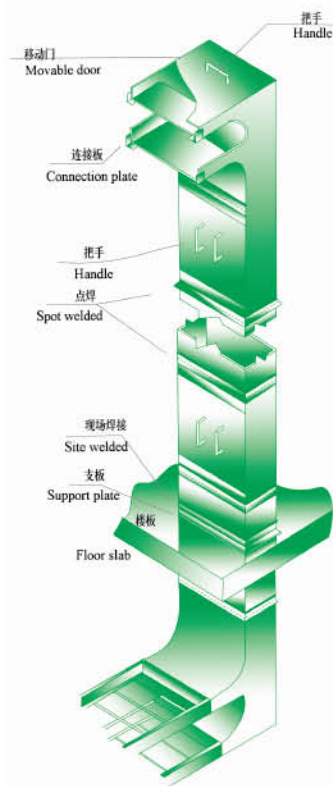


# XQJ-DSJ电缆竖井


电缆竖井适用于各种井道垂直引上、引下电缆敷设装置。Cable shafts are suitable for vertical cable laying lying various shafts

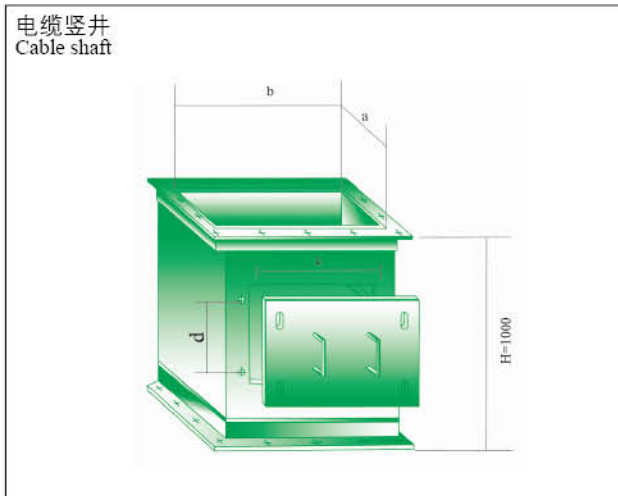


型号 Model	b	a	d × c	w (kg)
XV-4 × 3	400	300	600 × 240	51.63
XV-4 × 6		600		72.42
XV-5 × 3	500	300	600 × 340	59.38
XV-5 × 6		600		78.64
XV-6 × 3	600	300	600 × 440	65.51
XV-6 × 6		600		86.50
XV-8 × 3	800	300	600 × 600	89.72
XV-8 × 6		600		112.65
XV-10 × 3	1000	300	600 × 800	105.90
XV-10 × 6		600		128.63
XV-12 × 3	1200	300	600 × 1000	121.52
XV-12 × 6		600		144.36

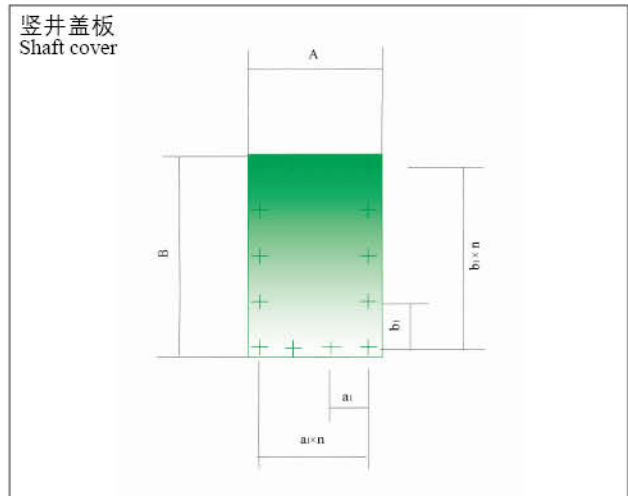

型号 Model	B	A	b <sub>1</sub> × n	a <sub>1</sub> × n	w (kg)
CXV-4 × 3	500	400	110 × 4	85 × 4	5.28
CXV-4 × 6		700		128 × 5	9.48
CXV-5 × 3	600	400	135 × 4	85 × 4	6.36
CXV-5 × 6		700		128 × 5	11.40
CXV-6 × 3	700	400	128 × 5	85 × 4	7.44
CXV-6 × 6		700		128 × 5	13.32
CXV-8 × 3	900	400	142 × 6	88 × 4	10.44
CXV-8 × 6		700		130 × 5	18.12
CXV-10 × 3	1100	400	105 × 10	88 × 4	12.72
CXV-10 × 6		700		130 × 5	22.08
CXV-12 × 3	1300	400	125 × 10	88 × 4	15.00
CXV-12 × 6		700		130 × 5	26.04

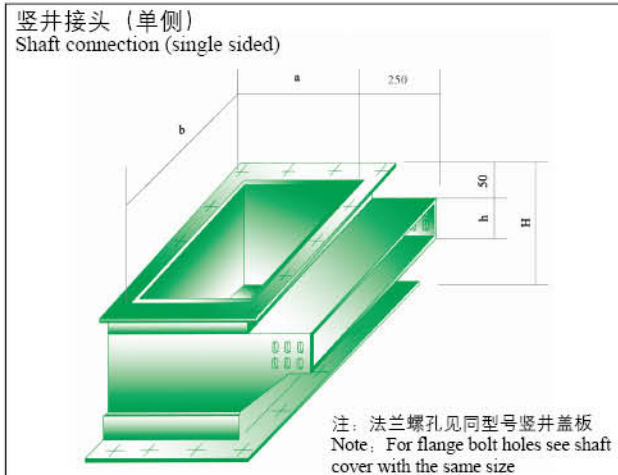


型号 Model	h	H	b	a	w (kg)	w <sub>1</sub> (kg)
XV-T1-4 × □ × 6	100	300	400	300/600	26.12	35.24
XV-T1-5 × □ × 6			500		29.76	38.76
XV-T1-6 × □ × 6			600		33.25	42.31
XV-T1-8 × □ × 6	150	350	800	300/600	49.21	60.44
XV-T1-4 × □ × 10			400		30.82	39.94
XV-T1-5 × □ × 10			500		31.99	43.40
XV-T1-6 × □ × 10	200	400	600	300/600	37.85	46.64
XV-T1-8 × □ × 10			800		53.71	64.94
XV-T1-10 × □ × 10			1000		62.23	73.56
XV-T1-4 × □ × 15	200	400	400	300/600	32.86	43.34
XV-T1-5 × □ × 15			500		36.59	46.56
XV-T1-6 × □ × 15			600		40.21	50.22
XV-T1-8 × □ × 15			800		56.40	68.58
XV-T1-10 × □ × 15			1000		65.21	77.56
XV-T1-12 × □ × 15			1200		74.05	86.23

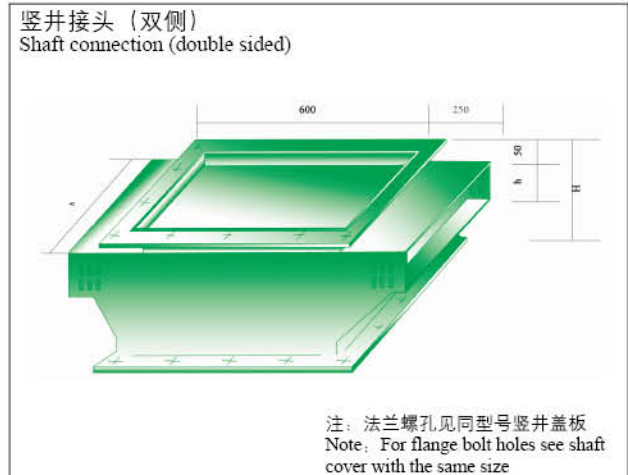

型号 Model	h	b	H	w (kg)
XV-T2-4 × 6 × 6	100	400	300	38.57
XV-T2-5 × 6 × 6		500		42.58
XV-T2-6 × 6 × 6		600		46.62
XV-T2-8 × 6 × 6	150	800	350	65.77
XV-T2-4 × 6 × 10		400		41.93
XV-T2-5 × 6 × 10		500		47.04
XV-T2-6 × 6 × 10	200	600	400	51.02
XV-T2-8 × 6 × 10		800		71.14
XV-T2-10 × 6 × 10		1000		81.85
XV-T2-4 × 6 × 15	200	400	400	52.10
XV-T2-5 × 6 × 15		500		55.94
XV-T2-6 × 6 × 15		600		59.90
XV-T2-8 × 6 × 15		800		78.90
XV-T2-10 × 6 × 15		1000		88.49
XV-T2-12 × 6 × 15		1200		98.98

# LQJ 铝镁合金电缆桥架

LQJ-01CT 型铝镁合金梯级桥架  
Type LQJ-01CT Al alloy ladder type cable support



型号 Model	H (mm)	B (mm)	L (mm)	单重 wkg/m	备注 Remarks		
LQJ-01CT-102	112	200	2000	5.60			
LQJ-01CT-103		300	3000	6.40			
LQJ-01CT-104		400	4000	7.20			
LQJ-01CT-105		500	5000	8.00			
LQJ-01CT-106		600	6000	9.50			
LQJ-01CT-108		800	6000	11.00			
LQJ-01CT-152		162	200	2000		7.10	
LQJ-01CT-153			300	3000		7.90	
LQJ-01CT-154	400		4000	8.65			
LQJ-01CT-155	500		5000	9.40			
LQJ-01CT-156	600		6000	11.00			
LQJ-01CT-158	800		6000	12.60			
LQJ-01CT-202	212		200	2000	9.30		
LQJ-01CT-203			300	3000	10.05		
LQJ-01CT-204		400	4000	11.00			
LQJ-01CT-205		500	5000	11.60			
LQJ-01CT-206		600	6000	13.00			
LQJ-01CT-208		800	6000	15.40			

LQJ-01CP 型铝镁合金托盘桥架  
Type LQJ-01CP Al alloy tray type cable support




型号 Model	H (mm)	B (mm)	L (mm)	单重 wkg/m	备注 Remarks		
LQJ-01CP-102	112	200	2000	6.59	B尺寸在500以上的加用梯级加强节		
LQJ-01CP-103		300	3000	8.75			
LQJ-01CP-104		400	4000	10.00			
LQJ-01CP-105		500	5000	11.20			
LQJ-01CP-106		600	5000	13.70			
LQJ-01CP-108		800	6000	16.20			
LQJ-01CP-152		162	200	2000		8.40	Ladder rein forcing section is provided for those B with dimension over 500
LQJ-01CP-153			300	3000		10.20	
LQJ-01CP-154	400		4000	11.40			
LQJ-01CP-155	500		5000	12.65			
LQJ-01CP-156	600		6000	15.10			
LQJ-01CP-158	800		6000	17.60			
LQJ-01CP-202	212		200	2000	10.50		
LQJ-01CP-203			300	3000	12.40		
LQJ-01CP-204		400	4000	13.60			
LQJ-01CP-205		500	5000	14.80			
LQJ-01CP-206		600	6000	17.25			
LQJ-01CP-208		800	6000	19.60			

LQJ-01CC 型铝镁合金槽式桥架  
Type LQJ-01CC Al alloy Channel type cable support




型号 Model	H (mm)	B (mm)	L (mm)	单重 wkg/m	备注 Remarks		
LQJ-01CC-102	112	200	2000	5.85	B尺寸在500以上的加用梯级加强节		
LQJ-01CC-103		300	3000	7.00			
LQJ-01CC-104		400	4000	8.80			
LQJ-01CC-105		500	4000	11.20			
LQJ-01CC-106		600	5000	13.65			
LQJ-01CC-108		800	6000	16.05			
LQJ-01CC-152		162	200	2000		8.40	Ladder rein forcing section is provided for those B with dimension over 500
LQJ-01CC-153			300	3000		10.20	
LQJ-01CC-154	400		4000	11.40			
LQJ-01CC-155	500		5000	12.60			
LQJ-01CC-156	600		6000	15.10			
LQJ-01CC-158	800		6000	17.60			
LQJ-01CC-202	212		200	2000	10.50		
LQJ-01CC-203			300	3000	12.40		
LQJ-01CC-204		400	4000	13.60			
LQJ-01CC-205		500	5000	14.80			
LQJ-01CC-206		600	6000	17.25			
LQJ-01CC-208		800	6000	21.00			

LQJ-02CT、P、C 型铝镁合金水平弯通桥架  
Type LQJ-02CT、P、C Al alloy horizontal bend cable support

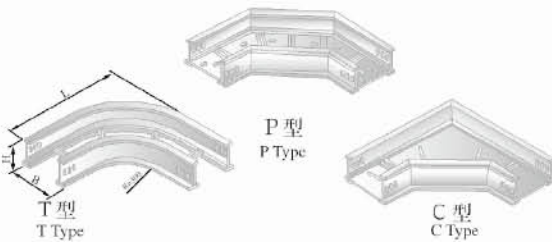

型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)				
				T 型 Type	P 型 Type	C 型 Type		
T P C 型	112	200	600	5.35	6.70	7.79		
		300	700	6.25	9.80	11.00		
		400	800	7.40	12.50	14.00		
		500	900	8.45	15.00	17.50		
		600	1000	10.50	22.70	24.90		
		800	1200	12.70	28.40	31.25		
		T P C 型	162	200	700	7.60	9.45	10.75
				300	800	8.75	13.00	14.60
400	900			9.90	16.00	17.20		
500	1000			11.05	19.40	21.50		
600	1100			13.35	27.20	30.20		
800	1300			16.00	35.40	39.10		
T P C 型	212			200	700	10.00	11.50	13.00
				300	800	11.30	15.20	17.20
		400	900	12.60	18.40	20.90		
		500	1000	13.90	22.50	25.50		
		600	1100	16.60	30.10	33.70		
		800	1300	19.80	37.60	41.90		


LQJ-03CT、P、C 型铝镁合金水平三通桥架  
Type LQJ-03CT、P、C Al alloy horizontal tee cable support

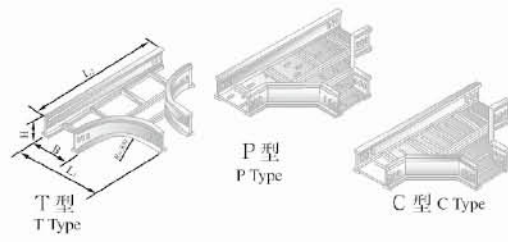

型号 Model	H (mm)	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	单件重量 (wkg)			
					T 型 Type	P、C 型 Type		
T P C 型	112	200	600	1000	10.25	10.75		
		300	700	1100	11.75	12.80		
		400	800	1200	13.30	15.00		
		500	900	1300	14.80	17.80		
		600	1000	1400	17.80	23.80		
		800	1200	1600	20.10	29.20		
		T P C 型	162	200	700	1200	13.80	13.20
				300	800	1300	15.40	16.90
400	900			1400	17.00	19.80		
500	1000			1500	18.60	22.90		
600	1100			1600	21.75	29.70		
800	1300			1800	24.80	35.40		
T P C 型	212			200	700	1200	15.10	16.00
				300	800	1300	17.11	19.70
		400	900	1400	19.50	22.80		
		500	1000	1500	22.20	25.90		
		600	1100	1600	25.60	33.00		
		800	1300	1800	29.00	40.10		


# LQJ铝镁合金电缆桥架

LQJ-04CT、P、C型铝镁合金水平四通桥架  
Type LQJ-04CT、P、C Al alloy horizontal cross cable support

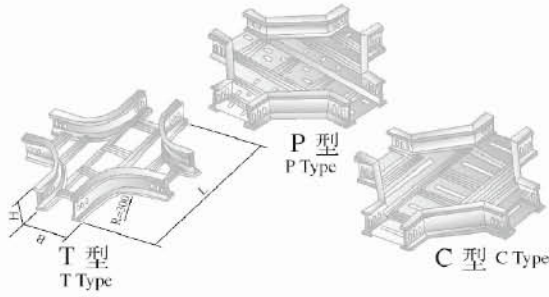


型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		备注 Remarks
				T 型Type	P、C 型Type	
T	112	200	1000	14.50	18.70	P、C型 B尺寸 在500 以上的 加用梯 级加强 节
P		300	1100	16.40	21.80	
C		400	1200	18.30	28.40	
型		500	1300	20.25	31.60	
		600	1400	24.10	34.20	
		800	1600	27.25	36.90	
T	162	200	1200	17.20	21.20	Ladder rein forcing section is provided for those B with dimension over 500
P		300	1300	21.10	24.40	
C		400	1400	23.00	27.90	
型		500	1500	24.90	35.40	
		600	1600	28.80	39.10	
		800	1800	32.90	43.75	
T	212	200	1200	22.90	24.40	
P		300	1300	24.80	27.90	
C		400	1400	26.70	35.40	
型		500	1500	28.65	39.10	
		600	1600	32.50	42.75	
		800	1800	36.90	48.40	

LQJ-05CT、P、C型铝镁合金垂直下弯通  
Type LQJ-05CT、P、C Al alloy vertical downward bend

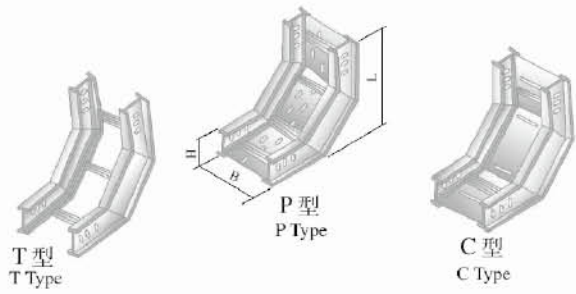


型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		备注 Remarks
				T 型Type	P、C 型Type	
T	112	200	412	3.95	5.10	P、C型 B尺寸 在500 以上的 加用梯 级加强 节
P		300		4.55	6.50	
C		400		5.15	7.45	
型		500		5.70	8.45	
		600		6.85	10.35	
		800		7.50	13.00	
T	162	200	612	6.30	8.25	Ladder rein forcing section is provided for those B with dimension over 500
P		300		6.80	10.10	
C		400		7.45	11.35	
型		500		8.05	12.55	
		600		9.15	15.10	
		800		10.20	17.20	
T	212	200	662	8.95	10.10	
P		300		10.10	13.15	
C		400		10.80	14.50	
型		500		11.95	15.85	
		600		12.95	18.50	
		800		14.10	21.40	

LQJ-06CT、P、C型铝镁合金垂直上弯通  
Type LQJ-06CT、P、C Al alloy vertical upward bend

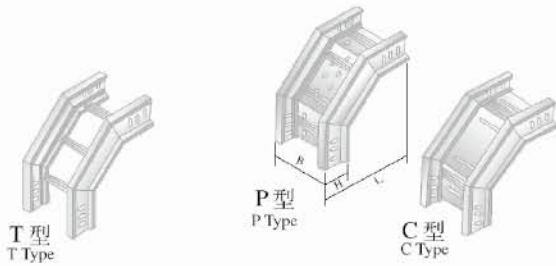

型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		备注 Remarks
				T 型Type	P、C 型Type	
T	112	200	400	3.95	4.65	P、C型 B尺寸 在500 以上的 加用梯 级加强 节
P		300		4.55	5.75	
C		400		5.15	6.55	
型		500		5.70	7.30	
		600		6.85	8.85	
		800		7.50	10.20	
T	162	200	600	6.30	7.30	Ladder rein forcing section is provided for those B with dimension over 500
P		300		6.80	9.10	
C		400		7.45	10.00	
型		500		8.05	11.00	
		600		9.15	13.00	
		800		10.20	15.20	
T	212	200	650	8.95	10.30	
P		300		9.50	11.75	
C		400		10.10	12.70	
型		500		10.65	13.65	
		600		11.80	15.65	
		800		12.95	18.40	

LQJ-07CT、P、C型铝镁合金转动弯通  
Type LQJ-07CT、P、C Al alloy rotatable bend

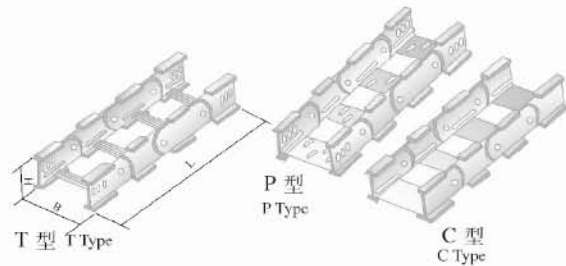

型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		备注 Remarks
				T 型Type	P、C 型Type	
T	112	200	600	6.15	7.20	
P		300		6.90	8.20	
C		400		7.70	9.10	
型		500		8.45	10.85	
		600		10.00	11.30	
		800		12.10	14.20	
T	162	200	800	9.50	10.45	
P		300		10.30	11.80	
C		400		11.40	12.90	
型		500		11.90	13.60	
		600		13.40	15.25	
		800		15.35	17.15	
T	212	200	1200	13.80	15.30	
P		300		14.60	16.95	
C		400		15.40	17.95	
型		500		16.10	18.40	
		600		17.65	20.15	
		800		19.20	22.10	


# LQJ铝镁合金电缆桥架

LPC-01A 型铝镁合金配线槽  
Type LPC-01A Al alloy cable duct




型号 Model	A (mm)	B (mm)	重量 w(kg)	备注 Remarks
LPC-01A-1	50	25	4.30	
LPC-01A-2	80	40	5.10	
LPC-01A-3	100	50	6.10	
LPC-01A-4	120	60	7.25	
LPC-01A-5	150	75	9.15	
LPC-01A-6	200	100	11.10	
LPC-01A-7	250	125	13.25	
LPC-01A-8	300	150	15.50	

LPC-02A 型铝镁合金水平弯通配线槽  
Type LPC-02A Al alloy horizontal bend cable duct

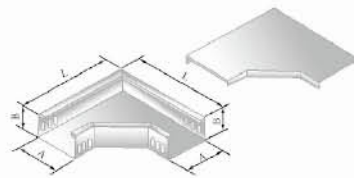


型号 Model	A (mm)	B (mm)	L (mm)	重量 w(kg)
LPC-02A-1	50	25	150	1.25
LPC-02A-2	80	40	280	2.15
LPC-02A-3	100	50	300	2.50
LPC-02A-4	120	60	320	2.80
LPC-02A-5	150	75	350	4.40
LPC-02A-6	200	100	450	5.80
LPC-02A-7	250	125	500	6.30
LPC-02A-8	300	150	650	7.20

LPC-03A 型铝镁合金水平三通配线槽  
Type LPC-03A Al alloy horizontal tee cable duct

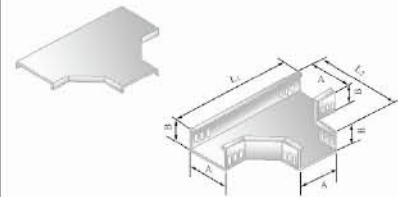


型号 Model	A (mm)	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	重量 w(kg)
LPC-03A-1	50	25	250	150	2.67
LPC-03A-2	80	40	480	280	3.03
LPC-03A-3	100	50	500	300	3.40
LPC-03A-4	120	60	520	320	4.00
LPC-03A-5	150	75	550	350	6.25
LPC-03A-6	200	100	700	450	8.55
LPC-03A-7	250	125	750	500	11.05
LPC-03A-8	300	150	1000	650	14.10

LPC-03B 型铝镁合金上垂直三通  
Type XQJ-LPC-03B Al alloy upward vertical tee




型号 Model	A (mm)	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	重量 w(kg)
LPC-03B-1	50	25	225	125	1.84
LPC-03B-2	80	40	440	240	2.20
LPC-03B-3	100	50	450	250	2.85
LPC-03B-4	120	60	460	260	3.30
LPC-03B-5	150	75	475	275	5.25
LPC-03B-6	200	100	600	350	7.30
LPC-03B-7	250	125	625	375	9.40
LPC-03B-8	300	150	850	500	11.60

LPC-03C 型铝镁合金下垂直三通  
Type XQJ-LPC-03C Al alloy downward vertical tee




型号 Model	A (mm)	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	重量 w(kg)
LPC-03C-1	50	25	225	125	1.90
LPC-03C-2	80	40	440	240	2.25
LPC-03C-3	100	50	450	250	3.00
LPC-03C-4	120	60	460	260	3.40
LPC-03C-5	150	75	475	275	5.40
LPC-03C-6	200	100	600	350	7.50
LPC-03C-7	250	125	625	375	9.80
LPC-03C-8	300	150	850	500	11.90

LPC-03D 型铝镁合金上侧垂直三通  
Type LPC-03D Al alloy topside vertical tee




型号 Model	A (mm)	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	重量 w(kg)
LPC-03D-1	50	25	250	125	1.94
LPC-03D-2	80	40	480	240	2.25
LPC-03D-3	100	50	500	250	2.90
LPC-03D-4	120	60	520	260	3.40
LPC-03D-5	150	75	550	275	5.30
LPC-03D-6	200	100	700	350	7.40
LPC-03D-7	250	125	750	375	9.60
LPC-03D-8	300	150	1000	500	11.70

LPC-03E 型铝镁合金下侧垂直三通  
Type LPC-03E Al alloy bottom side vertical tee

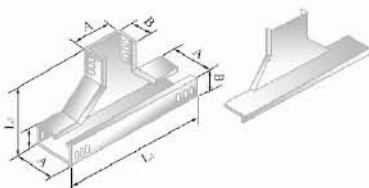


型号 Model	A (mm)	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	重量 w(kg)
LPC-03E-1	50	25	250	125	1.85
LPC-03E-2	80	40	480	240	2.30
LPC-03E-3	100	50	500	250	2.85
LPC-03E-4	120	60	520	260	3.60
LPC-03E-5	150	75	550	275	5.75
LPC-03E-6	200	100	700	350	7.90
LPC-03E-7	250	125	750	375	10.10
LPC-03E-8	300	150	1000	500	13.50

LPC-03F 型铝镁合金上角垂直三通  
Type LPC-03F Al alloy top angle vertical tee

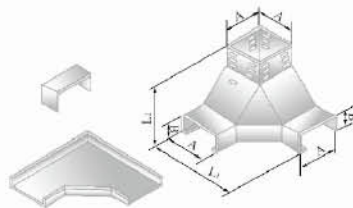


型号 Model	A (mm)	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	重量 w(kg)
LPC-03F-1	50	25	150	125	2.80
LPC-03F-2	80	40	280	240	3.45
LPC-03F-3	100	50	300	250	4.10
LPC-03F-4	120	60	320	260	4.80
LPC-03F-5	150	75	350	275	7.60
LPC-03F-6	200	100	450	350	10.40
LPC-03F-7	250	125	500	375	13.30
LPC-03F-8	300	150	650	500	16.20

LPC-03G 型铝镁合金下角垂直三通  
Type LPC-03G Al alloy bottom angle vertical tee

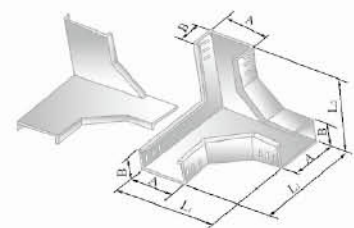


型号 Model	A (mm)	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	重量 w(kg)
LPC-03G-1	50	25	150	125	2.30
LPC-03G-2	80	40	280	240	2.80
LPC-03G-3	100	50	300	250	3.30
LPC-03G-4	120	60	320	260	3.80
LPC-03G-5	150	75	350	275	6.00
LPC-03G-6	200	100	450	350	8.30
LPC-03G-7	250	125	500	375	10.70
LPC-03G-8	300	150	650	500	13.10

LPC-04A 型铝镁合金水平四通配线槽  
Type LPC-04A Al alloy horizontal cross cable duct




型号 Model	A (mm)	B (mm)	L (mm)	重量 w(kg)
LPC-04A-1	50	25	250	3.90
LPC-04A-2	80	40	480	4.30
LPC-04A-3	100	50	500	4.75
LPC-04A-4	120	60	520	5.40
LPC-04A-5	150	75	550	8.40
LPC-04A-6	200	100	700	11.45
LPC-04A-7	250	125	750	14.60
LPC-04A-8	300	150	1000	17.20

LPC-04B 型铝镁合金上垂直四通  
Type LPC-04B Al alloy upward vertical cross

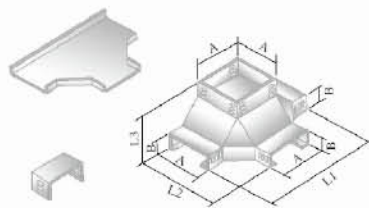


型号 Model	A×B (mm)	L1 (mm)	L2 (mm)	L3 (mm)	重量 w(kg)
LPC-04B-1	50×25	250	150	125	1.25
LPC-04B-2	80×40	480	280	240	3.70
LPC-04B-3	100×50	500	300	250	5.00
LPC-04B-4	120×60	520	320	260	6.00
LPC-04B-5	150×75	550	350	275	9.35
LPC-04B-6	200×100	700	450	350	13.00
LPC-04B-7	250×125	750	500	375	16.30
LPC-04B-8	300×150	1000	650	500	19.60

LPC-05A 型铝镁合金垂直上弯通  
Type LPC-05A Al alloy vertical top bend




型号 Model	A (mm)	B (mm)	L (mm)	重量 w(kg)
LPC-05A-1	50	25	125	1.30
LPC-05A-2	80	40	240	1.60
LPC-05A-3	100	50	250	1.90
LPC-05A-4	120	60	260	2.30
LPC-05A-5	150	75	275	3.40
LPC-05A-6	200	100	350	4.50
LPC-05A-7	250	125	375	5.70
LPC-05A-8	300	150	500	6.50

LPC-05B 型铝镁合金垂直下弯通  
Type LPC-05B Al alloy vertical bottom bend




型号 Model	A (mm)	B (mm)	L (mm)	重量 w(kg)
LPC-05B-1	50	25	125	1.60
LPC-05B-2	80	40	240	1.80
LPC-05B-3	100	50	250	2.20
LPC-05B-4	120	60	260	2.65
LPC-05B-5	150	75	275	3.80
LPC-05B-6	200	100	350	4.90
LPC-05B-7	250	125	375	6.15
LPC-05B-8	300	150	500	7.40

LPC-05C 型铝镁合金垂直左上弯通  
Type LPC-05C Al alloy vertical left top bend




型号 Model	A (mm)	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	重量 w(kg)
LPC-05C-1	50	25	150	100	1.10
LPC-05C-2	80	40	280	180	1.50
LPC-05C-3	100	50	300	200	2.00
LPC-05C-4	120	60	320	220	2.60
LPC-05C-5	150	75	350	250	3.85
LPC-05C-6	200	100	450	300	5.15
LPC-05C-7	250	125	500	350	6.80
LPC-05C-8	300	150	650	500	8.20

LPC-05D 型铝镁合金垂直左下弯通  
Type LPC-05D Al alloy vertical left bottom bend




型号 Model	A (mm)	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	重量 w(kg)
LPC-05D-1	50	25	150	125	1.40
LPC-05D-2	80	40	280	240	1.70
LPC-05D-3	100	50	300	250	2.20
LPC-05D-4	120	60	320	260	2.70
LPC-05D-5	150	75	350	275	4.00
LPC-05D-6	200	100	450	350	5.50
LPC-05D-7	250	125	500	375	7.20
LPC-05D-8	300	150	650	500	9.40

LPC-05E 型铝镁合金垂直右上弯通  
Type LPC-05E Al alloy vertical right top bend




型号 Model	A (mm)	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	重量 w(kg)
LPC-05E-1	50	25	150	100	1.10
LPC-05E-2	80	40	280	180	1.45
LPC-05E-3	100	50	300	200	2.00
LPC-05E-4	120	60	320	220	2.60
LPC-05E-5	150	75	350	250	3.85
LPC-05E-6	200	100	450	300	5.70
LPC-05E-7	250	125	500	360	7.60
LPC-05E-8	300	150	600	500	9.50

LPC-05F 型铝镁合金垂直右下弯通  
Type LPC-05F Al alloy vertical right bottom bend



型号 Model	A (mm)	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	重量 w(kg)
LPC-05F-1	50	25	150	125	1.40
LPC-05F-2	80	40	280	240	1.70
LPC-05F-3	100	50	300	250	2.20
LPC-05F-4	120	60	320	260	2.90
LPC-05F-5	150	75	350	275	4.00
LPC-05F-6	200	100	450	350	5.80
LPC-05F-7	250	125	500	375	7.70
LPC-05F-8	300	150	650	500	9.70


LPC-06A 型铝镁合金异径接头  
Type LPC-06A Al alloy reducer connector



型号 Model	A <sub>1</sub> ×B <sub>1</sub> (mm)	A <sub>2</sub> ×B <sub>2</sub> (mm)	L <sub>3</sub> (mm)	重量 w(kg)
LPC-06A-1	50×25	100×50	300	1.40
LPC-06A-2	80×40	150×75	300	2.10
LPC-06A-3	80×40	200×100	300	2.45
LPC-06A-4	100×50	200×100	350	3.80
LPC-06A-5	100×50	300×150	450	4.10
LPC-06A-6	200×100	250×125	350	4.40
LPC-06A-7	250×100	300×150	450	5.10
LPC-06A-8	250×125	300×150	450	5.40


# LQJ铝镁合金电缆桥架

LPC-06B 型铝镁合金异径接头  
Type LPC-06B Al alloy reducer connector



型号 Model	A <sub>1</sub> × B <sub>1</sub> (mm)	A <sub>2</sub> × B <sub>2</sub> (mm)	L (mm)	重量 w(kg)
LPC-06B-1	50 × 25	100 × 50	300	1.40
LPC-06B-2	80 × 40	150 × 75	300	2.10
LPC-06B-3	80 × 40	200 × 100	300	2.45
LPC-06B-4	100 × 50	200 × 100	350	3.80
LPC-06B-5	100 × 50	300 × 150	450	4.10
LPC-06B-6	200 × 100	250 × 125	350	4.40
LPC-06B-7	200 × 100	300 × 150	450	5.10
LPC-06B-8	250 × 125	300 × 150	450	5.40

LPC-01B 型铝镁合金配线槽封头  
Type LPC-01B Al alloy cable duct head




型号 Model	A (mm)	B (mm)	A <sub>1</sub> × B <sub>1</sub> (mm)	重量 w(kg)
LPC-01B-1	50	25	46 × 21	0.10
LPC-01B-2	80	40	76 × 36	0.15
LPC-01B-3	100	50	96 × 46	0.20
LPC-01B-4	120	60	116 × 56	0.32
LPC-01B-5	150	75	145 × 70	0.45
LPC-01B-6	200	100	195 × 95	0.60
LPC-01B-7	250	125	245 × 120	0.68
LPC-01B-8	300	150	295 × 145	0.72

LFZ-01 型铝镁合金直通护罩  
Type LFZ-01 Al alloy straight cover




型号 Model	B (mm)	重量 w(kg)	备注 Remarks
LFZ-01-2	200	5.10	
LFZ-01-3	300	7.30	
LFZ-01-4	400	10.40	
LFZ-01-5	500	12.60	
LFZ-01-6	600	15.45	
LFZ-01-8	800	18.80	
LFZ-01-9	900	20.10	
LFZ-01-10	1000	23.25	

LFZ-02 型铝镁合金水平弯通护罩  
Type LFZ-02 Al alloy horizontal bend cover

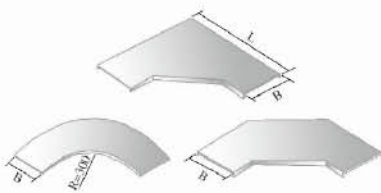


型号 Model	B (mm)	L(mm)		重量 w(kg)
		I	II	
LFZ-02-2	200	600	700	4.25
LFZ-02-3	300	700	800	6.20
LFZ-02-4	400	800	900	8.20
LFZ-02-5	500	900	1000	10.40
LFZ-02-6	600	1000	1100	15.30
LFZ-02-8	800	1200	1300	17.80
LFZ-02-9	900	1300	1400	21.30
LFZ-02-10	1000	1400	1500	24.40

LFZ-03 型铝镁合金水平三通护罩  
Type LFZ-03 Al alloy horizontal tee cover

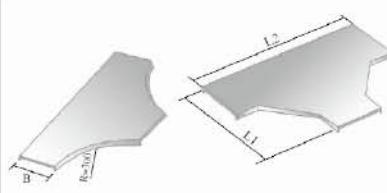


型号 Model	B (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	重量 w(kg)
LFZ-03-2	200	700	1200	8.30
LFZ-03-3	300	800	1300	12.00
LFZ-03-4	400	900	1400	14.25
LFZ-03-5	500	1000	1500	16.70
LFZ-03-6	600	1100	1600	22.10
LFZ-03-8	800	1300	1800	24.80
LFZ-03-9	900	1400	1900	28.25
LFZ-03-10	1000	1500	2000	31.10

LFZ-04 型铝镁合金水平四通护罩  
Type LFZ-04 Al alloy horizontal cross cover

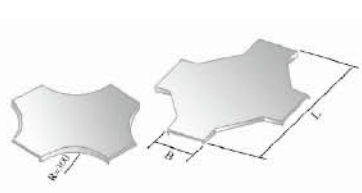


型号 Model	B (mm)	L(mm)		重量 w(kg)
		I	II	
LFZ-04-2	200	1000	1200	13.00
LFZ-04-3	300	1100	1300	18.10
LFZ-04-4	400	1200	1400	20.80
LFZ-04-5	500	1300	1500	23.65
LFZ-04-6	600	1400	1600	29.95
LFZ-04-8	800	1600	1800	33.25
LFZ-04-9	900	1700	1900	37.00
LFZ-04-10	1000	1800	2000	41.20

LFZ-05 型铝镁合金垂直下弯通护罩  
Type LFZ-05 Al alloy vertical bottom bend cover




型号 Model	B (mm)	L(mm)			重量 w(kg)
		I	II	III	
LFZ-05-2	200	300	450	500	2.00
LFZ-05-3	300				3.10
LFZ-05-4	400				3.80
LFZ-05-5	500				4.55
LFZ-05-6	600				5.95
LFZ-05-8	800				6.25
LFZ-05-9	900				7.35
LFZ-05-10	1000				8.60

LFZ-06 型铝镁合金垂直上弯通护罩  
Type LFZ-06 Al alloy vertical top bend cover



型号 Model	B (mm)	L(mm)			重量 w(kg)
		I	II	III	
LFZ-06-2	200	400	550	600	2.98
LFZ-06-3	300				3.85
LFZ-06-4	400				4.70
LFZ-06-5	500				5.60
LFZ-06-6	600				7.35
LFZ-06-8	800				8.25
LFZ-06-9	900				9.10
LFZ-06-10	1000				10.20

LFZ-07 型铝镁合金转动弯通护罩  
Type LFZ-07 Al alloy rotatable bend cover

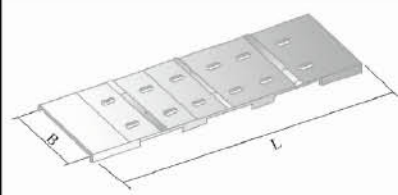

型号 Model	B (mm)	L(mm)			重量 w(kg)
		I	II	III	
LFZ-07-2	200	600	800	1200	3.00
LFZ-07-3	300				4.65
LFZ-07-4	400				5.70
LFZ-07-5	500				6.80
LFZ-07-6	600				8.90
LFZ-07-8	800				10.00
LFZ-07-9	900				11.30
LFZ-07-10	1000				12.60

# 防火电缆桥架

## FQJ系列

FQJ系列电缆桥架有良好的绝热、防火、防腐和适用于广泛环境的性能，还具有重量轻、承载力大、安全可靠的特点，技术上达到了国内先进水平。

对于不同使用场合，FQJ系列防火槽盒可分为五部分：

1) 耐火型全封闭槽盒：该产品适用于10kV以下电力电缆，以及控制电缆、照明配线等室内室外架空电缆沟、隧道的敷设。

2) 耐火型半封闭槽盒：该产品能够经受火焰熏烤，槽内温度可以限制在电缆安全运行允许值内，盒盖为双层盖板。除了有防雨功能外，在遇高温时可自动下落，盖住散热孔，隔绝空气。

3) 电缆隧道用耐火槽盒：该产品可广泛用隧道、地下公共设施等场合。具有良好的通风透气性，当槽盒着火或电缆过热时，由于火焰作用使原来开启的浸有特种防火涂料的通风网孔堵塞，并膨胀成厚厚的碳屑包复电缆，网上小盖自动下落，盖住网面，使燃烧介质缺氧自熄。

4) 耐火型无机槽盒：该产品用无机材料与增强玻璃纤维构成，耐火结构为全封闭式，有效防止电缆自燃及外部火种的危害。另由于选用无机材料，特别适用于酸、碱腐蚀严重的场合。

5) 普通型防火槽盒：该产品用普通钢板加工制作，在槽盒外表喷涂上防火涂料，槽盒内衬上阻燃板。

## Fire-proof Cables

### FQJ series

FQJ series of cable have good function like heat insulation, fire-proof, corrosion-resisting and also are suitable for wide-ranging environment. They have characteristics of light weight, heavy load and reliable safety, and also have reached the advanced standard in country.

FQJ series of fire-proof channel box can be divided into for parts as follows according to different use occasions.

(1) Fully-sealed channel box of fire-proof type: The product suits the power cable below 10kv, and also suits the control cable, lightning Lines to be Laid in the areial cable ditch and channel indoors or outdoors.

(2) Half-sealed channel box of the fire-proof type: The product can experience flame stifling, temperature in the channel can be limited to be permitted value for the safety motion of cable. The box cover is double board. Besides the function against rain, it can fall automatically when temperature is high enough, covering the cooling hole to avoid air.


(3) Fire-proof channel box for cable tunnel: The product is widely-used for the tunnel, some underground public facilities and some other occasions. It's well ventilated. When the channel box catches fire or the cable is hotter, the opened ventilated mesh soaked with special refractory coating is blocked because of the flames, and also expanded to thick carbon bits covering the cable, the small cover on the net falls automatically to cover the net face, as a result, causing the burning medium to go out because of the absence of Oxygen.

(4) Inorganic channel box of fire-proof type: The product is formed with the inorganic material and strengthened glass fibre. The refractory structure is fully sealed. It can prevent efficiently the self-burning of the cable and the danger of the outer kindling material. Because of inorganic material, it is especially suitable for the occasions of serious acid and alkali corrosion.

(5) Common type of fire box trough: The product produced by an ordinary steel plate processing, cartridge in the slot on the appearance of spraying fire retardant coating, slot box lined on the flame-retardant board.


# FQJ防火电缆桥架

## 耐火型全封闭槽盒 FQJ-01A

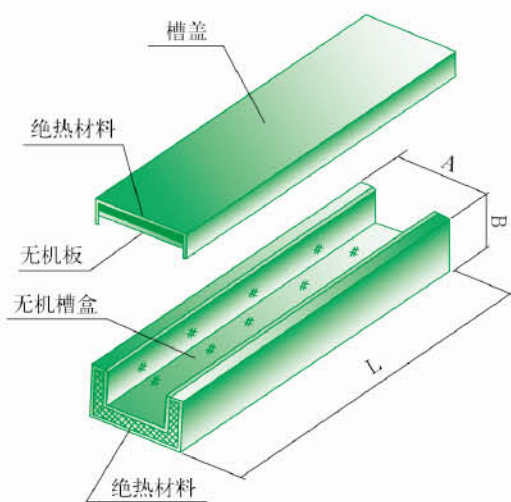

型 格 Model	外 型 尺 寸		内 截 面 宽 × 高	
	槽 宽	边 高		
FQJ-01A-15a	150	100	100	60
FQJ-01A-20a	200	100	150	60
FQJ-01A-30a	300	100	250	60
FQJ-01A-40a	400	100	350	60
FQJ-01A-20b	200	150	150	110
FQJ-01A-30b	300	150	250	110
FQJ-01A-40b	400	150	350	110
FQJ-01A-50b	500	150	450	110
FQJ-01A-30c	300	200	250	160
FQJ-01A-40c	400	200	350	160
FQJ-01A-50c	500	200	450	160
FQJ-01A-60c	600	200	550	160
FQJ-01A-40d	400	250	350	210
FQJ-01A-50d	500	250	450	210
FQJ-01A-60d	600	250	550	210
FQJ-01A-80d	800	250	750	210
FQJ-01A-50e	500	300	450	260
FQJ-01A-60e	600	300	550	260


## 耐火型半封闭槽盒 FQJ-01B

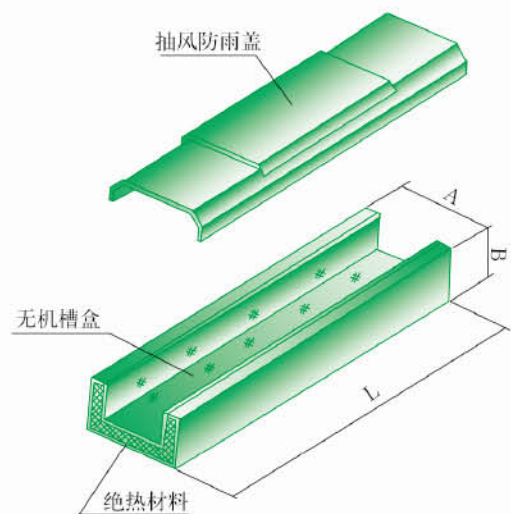

型 格 Model	外 型 尺 寸		内 截 面 宽 × 高	
	槽 宽	边 高		
FQJ-01B-15a	150	100	100	60
FQJ-01B-20a	200	100	150	60
FQJ-01B-30a	300	100	250	60
FQJ-01B-40a	400	100	350	60
FQJ-01B-20b	200	150	150	110
FQJ-01B-30b	300	150	250	110
FQJ-01B-40b	400	150	350	110
FQJ-01B-50b	500	150	450	110
FQJ-01B-30c	300	200	250	160
FQJ-01B-40c	400	200	350	160
FQJ-01B-50c	500	200	450	160
FQJ-01B-60c	600	200	550	160
FQJ-01B-40d	400	250	350	210
FQJ-01B-50d	500	250	450	210
FQJ-01B-60d	600	250	550	210
FQJ-01B-80d	800	250	750	210
FQJ-01B-50e	500	300	450	260
FQJ-01B-60e	600	300	550	260


# FQJ防火电缆桥架

## 电缆隧道用耐火槽盒 FQJ-01C

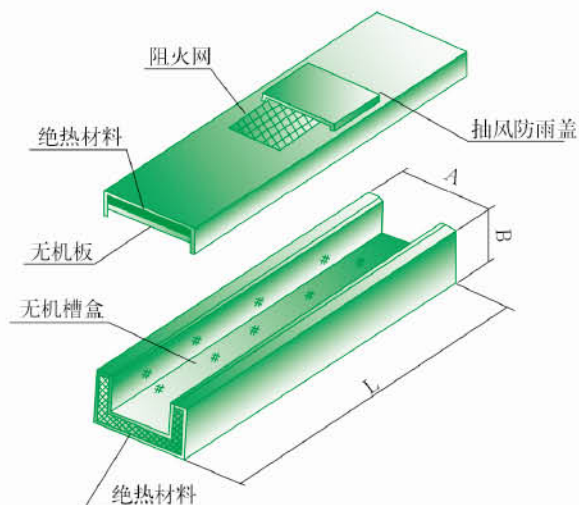

型 格 Model	外 型 尺 寸		内 截 面 宽 × 高	
	槽 宽	边 高		
FQJ-01C-15a	150	100	100	60
FQJ-01C-20a	200	100	150	60
FQJ-01C-30a	300	100	250	60
FQJ-01C-40a	400	100	350	60
FQJ-01C-20b	200	150	150	110
FQJ-01C-30b	300	150	250	110
FQJ-01C-40b	400	150	350	110
FQJ-01C-50b	500	150	450	110
FQJ-01C-30c	300	200	250	160
FQJ-01C-40c	400	200	350	160
FQJ-01C-50c	500	200	450	160
FQJ-01C-60c	600	200	550	160
FQJ-01C-40d	400	250	350	210
FQJ-01C-50d	500	250	450	210
FQJ-01C-60d	600	250	550	210
FQJ-01C-80d	800	250	750	210
FQJ-01C-50e	500	300	450	260
FQJ-01C-60e	600	300	550	260

## 耐火型无机槽盒 FQJ-01D

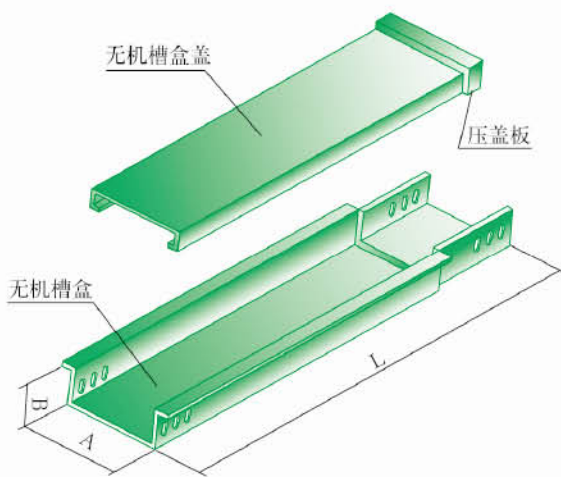

型 格 Model	外 型 尺 寸		内 截 面 宽 × 高	
	槽 宽	边 高		
FQJ-01D-15a	150	100	130	80
FQJ-01D-20a	200	100	180	80
FQJ-01D-30a	300	100	180	80
FQJ-01D-40a	400	100	380	80
FQJ-01D-20b	200	150	180	130
FQJ-01D-30b	300	150	280	130
FQJ-01D-40b	400	150	380	130
FQJ-01D-50b	500	150	480	130
FQJ-01D-30c	300	200	280	180
FQJ-01D-40c	400	200	380	180
FQJ-01D-50c	500	200	480	180
FQJ-01D-60c	600	200	580	180
FQJ-01D-40d	400	250	380	230
FQJ-01D-50d	500	250	480	230
FQJ-01D-60d	600	250	580	230
FQJ-01D-80d	800	250	780	230
FQJ-01D-50e	500	300	480	280
FQJ-01D-60e	600	300	580	280

## 玻璃钢桥架

### Fiberglass Cable Tray


BQJ玻璃钢桥架是拉挤玻璃钢材料制成。拉挤玻璃钢是用连续玻璃纤维无捻粗纱、玻璃纤维连续毡、表面毡等增强材料浸渍热固性树脂以后，在牵引力的作用下，从加热的金属模具中拉出，树脂在高温、高压下固化，从而得到连续的表面光洁、尺寸稳定、强度极高的一种玻璃钢型材。拉挤玻璃钢材料具有致密的增强纤维，并在高温高压下成型，因而拉挤玻璃钢桥架构造更合理、耐老化性更强、材质更均匀、强度更均匀、强度更高、尺寸更稳定、外表更美观。

BQJ fiberglass cable tray is made of reinforced fiberglass materials. Reinforced fiberglass is made of reinforced materials and resin under high temperature and high pressure. Reinforced fiberglass is smooth, dimensionally stable and high tension. Because reinforced fiberglass is made of delicate fiber under high temperature and high pressure, the structure of fiberglass cable tray is more reasonable, more beautiful, more stable longer life, better distribution than other cable trays.





BQJ玻璃钢桥架在不同跨距下最大允许均布载荷变形量见下图

Diagram showing the deformation under permissible max. evenly-distributed load of BQJ flame-retardant fibreglass reinforced plastic cable tray system with different span

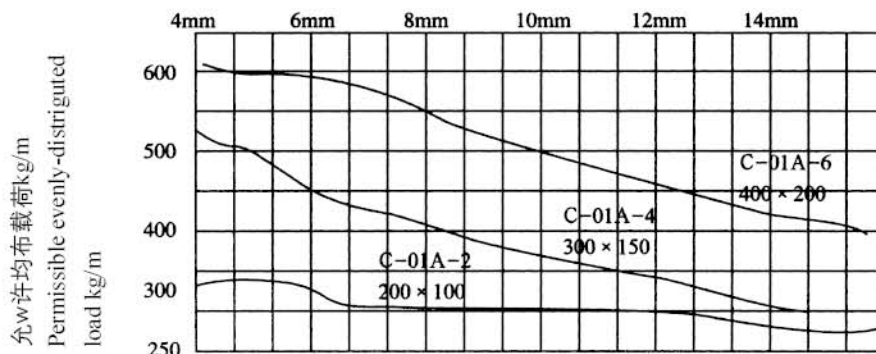


# 立柱

XQJ-H-01A 工字钢立柱 H-girder Column Model XQJ-H-01A		序号 No.	型号 Model	B=80 × L		B=100 × L	
 II 型加重3.07kg/件 For Model II, the weight of each is added by 3.07kg				重量/件(kg) Weight/Piece	重量/件(kg) Weight/Piece	重量/件(kg) Weight/Piece	重量/件(kg) Weight/Piece
		1	H-01A-3	300	3.36	300	4.26
2	H-01A-5	500	5.60	500	7.10		
3	H-01A-8	800	8.96	800	11.36		
4	H-01A-10	1000	11.20	1000	14.20		
5	H-01A-15	1500	16.80	1500	21.30		
6	H-01A-20	2000	22.40	2000	28.40		
7	H-01A-25	2500	28.00	2500	35.50		
8	H-01A-30	3000	33.60	3000	42.60		

XQJ-H-01B 丁字钢立柱 T-iron Column Model XQJ-H-01B		序号 No.	型号 Model	规格L Size	重量/件(kg) Weight/Piece	备注Remarks
 II 型加重1.61kg/件 For Model II, the weight of each is added by 1.61kg						
		1	H-01B-3	300	3.24	
2	H-01B-5	500	5.42			
3	H-01B-8	800	8.65			
4	H-01B-10	1000	10.81			
5	H-01B-15	1500	16.22			
6	H-01B-20	2000	21.61			


XQJ-H-01C 槽钢立柱 E-channel Column Model XQJ-H-01C		序号 No.	型号 Model	规格L Size	重量/件(kg) Weight/Piece	备注Remarks
 II 型加重2.6kg/件 For Model II, the weight of each is added by 2.6kg						
		1	H-01C-3	300	3.64	
2	H-01C-5	500	6.05			
3	H-01C-8	800	9.68			
4	H-01C-10	1000	12.10			
5	H-01C-15	1500	18.15			
6	H-01C-20	2000	24.20			

XQJ-H-01D 角钢立柱 Angle Iron Column Model XQJ-H-01D		序号 No.	型号 Model	规格L Size	重量/件(kg) Weight/Piece	备注Remarks
 II 型加重2.61kg/件 For Model II, the weight of each is added by 2.61kg						
		1	H-01D-3	300	1.62	
2	H-01D-5	500	2.71			
3	H-01D-8	800	4.33			
4	H-01D-10	1000	5.40			
5	H-01D-15	1500	8.11			
6	H-01D-20	2000	10.80			



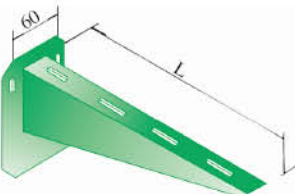
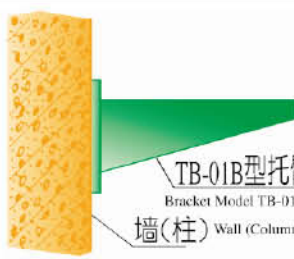
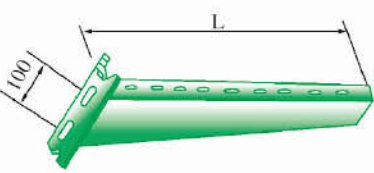
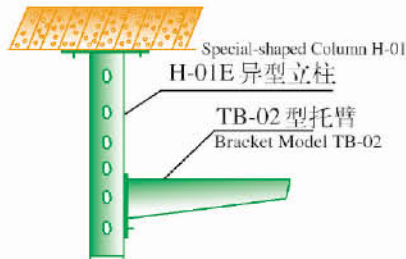

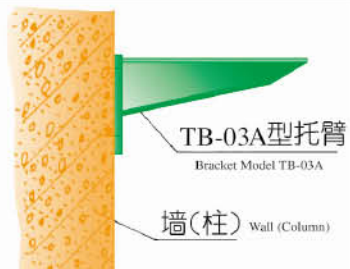
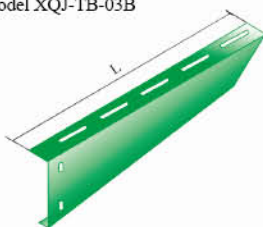
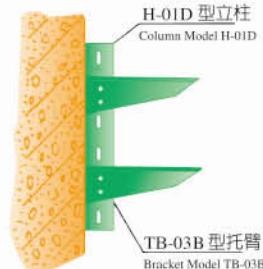
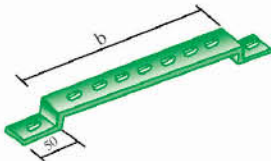
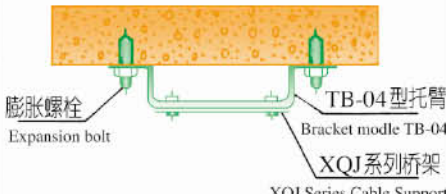
XQJ-H-01E 异型立柱 Special-shaped Steel Column Model XQJ-H-01E		序号 No.	型号 Model	规格L Size	重量/件(kg) Weight/Piece	备注Remarks
 II 型加重2.8kg/件 For Model II, the weight of each is added by 2.8kg						
		1	H-01E-3	300	3.92	
2	H-01E-5	500	6.50			
3	H-01E-8	800	8.80			
4	H-01E-10	1000	10.9			
5	H-01E-15	1500	13.6			
6	H-01E-20	2000	16.8			

XQJ-ZJ1 型支架 Support Model XQJ-ZJ1		型号 Model	b (mm)	a (mm)	c (mm)	e (mm)	重量Weight
		ZJ1-2	250	250	/	50	4.05
		ZJ1-3	350				4.59
ZJ1-4	450	4.93					
ZJ1-5	550	7.89					
ZJ1-6	650	8.64					
ZJ1-10	1050	12.11					
		ZJ1-12	1250	280	470	63	13.60
							570

XQJ-ZJ2 型支架 Support Model XQJ-ZJ2		型号 Model	b (mm)	c (mm)	重量Weight
		ZJ2-2	250	/	1.99
		ZJ2-3	350		2.28
ZJ2-4	450	3.59			
ZJ2-5	550	4.38			
ZJ2-6	650	5.18			
ZJ2-10	1050	8.42			
		ZJ2-12	1250	470	10.02
				570	


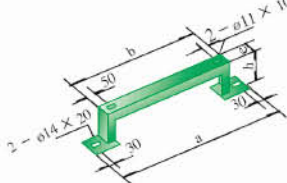
XQJ-ZJ3 型支架 Support Model XQJ-ZJ3		型号 Model	b (mm)	a (mm)	c (mm)	e (mm)	重量Weight
		ZJ3-1	150	270	90	40 × 4	2.17
		ZJ3-2	250	370			2.97
ZJ3-3	350	470	3.12				
		ZJ3-4	450	570	110	50 × 5	4.27
		ZJ3-5	550	670			4.82
ZJ3-6	650	770	5.37				
ZJ3-10	1050	1170	10.59				
ZJ3-12	1250	1370	12.10				



# 托臂


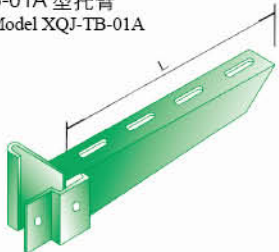
产品外形 Shape	型号 Model	L	重量 kg Weight	安装图例 Schematic diagram
XQJ-TB-01A 型托臂 Bracket Model XQJ-TB-01A 	TB-01A-100	120	4.46	 H-01A型I字钢立柱 I-shaped Steel Column H-01A TB-01A 型托臂 Bracket model TB-01A
	TB-01A-150	170	5.00	
	TB-01A-200	220	5.35	
	TB-01A-250	270	5.80	
	TB-01A-300	320	6.50	
	TB-01A-400	420	7.4	
	TB-01A-500	520	8.20	
	TB-01A-600	620	13.82	
	TB-01A-800	820	16.2	
	TB-01A-1000	1020	19.82	
XQJ-TB-01B 型托臂 Bracket Model XQJ-TB-01B 	TB-01B-100	120	4.30	 TB-01B型托臂 Bracket Model TB-01B 墙(柱) Wall (Column)
	TB-01B-150	170	4.69	
	TB-01B-200	220	5.35	
	TB-01B-250	270	5.2	
	TB-01B-300	320	5.59	
	TB-01B-400	420	7.33	
	TB-01B-500	520	9.13	
	TB-01B-600	620	9.9	
	TB-01B-800	820	13.91	
	TB-01B-1000	1020	18.95	
XQJ-TB-02 型托臂 Bracket Model XQJ-TB-02 	TB-02-100	120	2.96	 Special-shaped Column H-01 H-01E 异型立柱 TB-02 型托臂 Bracket Model TB-02
	TB-02-150	170	3.15	
	TB-02-200	220	3.35	
	TB-02-250	270	4.45	
	TB-02-300	320	4.58	
	TB-02-400	420	6.90	
	TB-02-500	520	9.83	
	TB-02-600	620	12.41	
	TB-02-800	820	16.3	
	TB-02-1000	1020	18.29	
XQJ-TB-03A 型托臂 Bracket Model XQJ-TB-03A 	TB-03A-100	120	2.96	 TB-03A型托臂 Bracket Model TB-03A 墙(柱) Wall (Column)
	TB-03A-150	170	3.15	
	TB-03A-200	220	3.35	
	TB-03A-250	270	4.45	
	TB-03A-300	320	4.58	
	TB-03A-400	420	6.9	
	TB-03A-500	520	9.83	
	TB-03A-600	620	12.41	
	TB-03A-800	820	16.3	
	TB-03A-1000	1020	18.29	
XQJ-TB-03B型托臂 Bracket Model XQJ-TB-03B 	TB-03B-100	120	2.25	 H-01D 型立柱 Column Model H-01D TB-03B 型托臂 Bracket Model TB-03B
	TB-03B-150	170	2.50	
	TB-03B-200	220	2.92	
	TB-03B-250	270	3.45	
	TB-03B-300	320	4.18	
	TB-03B-400	420	6.00	
	TB-03B-500	520	7.96	
	TB-03B-600	620	8.94	
	TB-03B-800	820	10.96	
	TB-03B-1000	1020	12.86	
XQJ-TB-04 型托臂 Bracket Model XQJ-TB-04 	TB-04-150	170	3.46	 膨胀螺栓 Expansion bolt TB-04 型托臂 Bracket model TB-04 XQJ 系列桥架 XQJ Series Cable Support
	TB-04-200	220	3.70	
	TB-04-300	320	4.19	
	TB-04-350	370	4.34	
	TB-04-400	420	4.64	
	TB-04-500	520	5.06	
	TB-04-550	570	6.26	
	TB-04-600	620	6.78	
	TB-04-700	720	7.42	
	TB-04-800	820	8.02	



# 连接附件



产品外形 Shape	型号 Model	侧边高H (mm) Side Height	H1 (mm)	B1 (mm)	安装图例 Schematic diagram
XQJ-TPC-01A 调宽片 Width adjusting piece BTK 	TPC-01A-100	75	50	100	 Width adjusting piece 调宽片 Connection bolt 连接螺栓 Cable Support 电缆桥架
	TPC-01A-150			150	
	TPC-01A-200			200	
	TPC-01A-300			300	
	TPC-01A-400			400	
	TPC-01A-500			500	
	TPC-01A-600			600	

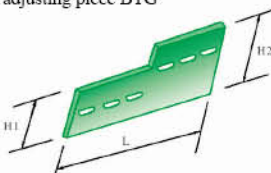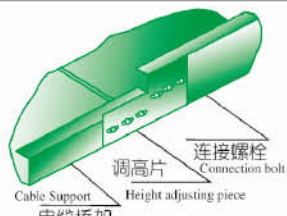
产品外形 Shape	型号 Model	H1 (mm)	H2 (mm)	L (mm)	重量 kg Weight	安装图例 Schematic diagram
XQJ-TPC-01B 调高片 Height adjusting piece BTG 	TPC-01B-75/100	50	75	182	0.94	 Cable Support 电缆桥架 Height adjusting piece 调高片 Connection bolt 连接螺栓
	TPC-01B-75/150	50	125	282	1.62	
	TPC-01B-75/200	50	175		1.62	
	TPC-01B-100/150	75	125	1.62		
	TPC-01B-100/200	75	175	2.10		
	TPC-01B-150/200	125	175	382	2.10	


产品外形 Shape	型号 Model	侧边高H (mm)	L (mm)	H1 (mm)	重量 kg Weight	安装图例 Schematic diagram
XQJ-TPC-02 直接片 Straight Connection piece BLJ 	TPC-02-50	60	182	35	0.77	TPC-02B 100、150、200型  配套大跨距电缆桥架直接片
	TPC-02-75	75		50	0.86	
	TPC-02-100	100		75	0.94	
	TPC-02-125	125	100	1.24		
	TPC-02-150	150	125	1.62		
	TPC-02-200	200	175	2.85		

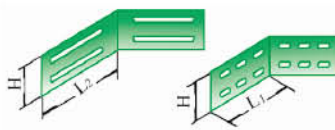产品外形 Shape	型号 Model	H (mm)	L1 (mm)	L2 (mm)	重量 kg Weight	安装图例 Schematic diagram
XQJ-TPC-03 弯接片 Bend connection piece BLS 	TPC-03-50	25	91	200	0.81	 弯接片 Bend connection piece 电缆桥架 Cable Support 连接螺栓 Connection bolt
	TPC-03-75	50			1.03	
	TPC-03-100	75	1.77			
	TPC-03-150	125	191	300	2.23	
	TPC-03-200	175	3.10			

产品外形 Shape	型号 Model	H1 (mm)	H2 (mm)	L (mm)	重量 kg Weight	安装图例 Schematic diagram
XQJ-TPC-04 调角片 Angle adjusting piece BTJ 	TPC-04-75	75	50	166	0.61	 调角片 Angle adjusting piece 连接螺栓 Connection bolt 电缆桥架 Cable support
	TPC-04-100	100	75	191	1.12	
	TPC-04-150	150	125	341	2.02	
	TPC-04-200	200	175	391	2.98	


产品外形 Shape	描述	安装图例 Schematic diagram
XQJ-TPC-05 固定压板 Fixed holddown plate 	TPC-05固定压板。主要用于梯级式桥架与托臂压固及梯级式桥架垂直安装时与墙壁固定。	 梯级式桥架 Ladder Support 固定压板 holddown plate 连接螺栓 Connection bolt 托臂 bracket

产品外形 Shape	型号 Model	H1 (mm)	H (mm)	重量 kg Weight
XQJ-TPC-07 隔板 Partition plate 	TPC-07-75	75	40	2.9
	TPC-07-100	100	80	5.8
	TPC-07-400	150	120	8.7
	TPC-07-500	200	170	11.8

  
 电缆桥架 Cable Support  
 隔板 Partition plate  
 连接螺栓 Connection bolt


## 连接附件

XQJ-TPC-08 直通护罩  
XQJ-TPC-08 Straight Cover




序号 No.	型号 Model	B (mm)	重量 (kg) Weight
1	XQJ-TPC-08-1	100	7.85
2	XQJ-TPC-08-2	200	9.42
3	XQJ-TPC-08-3	300	13.18
4	XQJ-TPC-08-4	400	19.90
5	XQJ-TPC-08-5	500	24.45
6	XQJ-TPC-08-6	600	35.62
7	XQJ-TPC-08-8	800	46.21

XQJ-TPC-09 弯通护罩(R)  
XQJ-TPC-09 Elbow Joint Cover

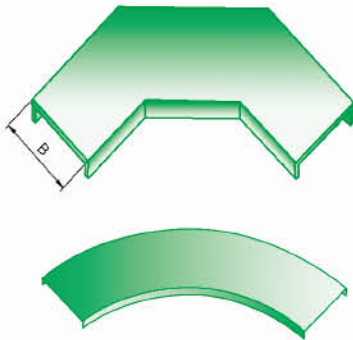


序号 No.	型号 Model	B (mm)	重量 (kg) Weight	重量Weight (kg) R=490(mm)
1	XQJ-TPC-09-1	100	3.45	4.49
2	XQJ-TPC-09-2	200	7.07	9.19
3	XQJ-TPC-09-3	300	10.97	14.26
4	XQJ-TPC-09-4	400	14.37	18.68
5	XQJ-TPC-09-5	500	23.91	31.08
6	XQJ-TPC-09-6	600	30.37	39.48
7	XQJ-TPC-09-8	800	45.26	58.84

XQJ-TPC-10 三通护罩(R)  
XQJ-TPC-10 Tee Joint Cover



序号 No.	型号 Model	B (mm)	重量 (kg) Weight	重量Weight (kg) R=490(mm)
1	XQJ-TPC-10-1	100	4.48	5.83
2	XQJ-TPC-10-2	200	6.18	8.04
3	XQJ-TPC-10-3	300	13.57	17.65
4	XQJ-TPC-10-4	400	21.49	27.94
5	XQJ-TPC-10-5	500	27.50	35.78
6	XQJ-TPC-10-6	600	35.76	46.49
7	XQJ-TPC-10-8	800	50.74	65.96

XQJ-TPC-11 四通护罩(R)  
XQJ-TPC-11 Cross Joint Cover

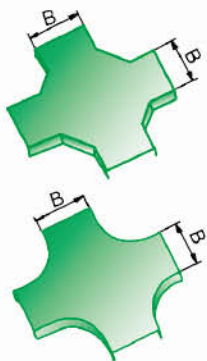

序号 No.	型号 Model	B (mm)	重量 (kg) Weight	重量Weight (kg) R=490(mm)
1	XQJ-TPC-11-1	100	6.98	9.07
2	XQJ-TPC-11-2	200	9.97	12.96
3	XQJ-TPC-11-3	300	23.04	29.95
4	XQJ-TPC-11-4	400	32.56	42.33
5	XQJ-TPC-11-5	500	51.84	67.39
6	XQJ-TPC-11-6	600	56.56	73.53
7	XQJ-TPC-11-8	800	63.49	82.54

## 连接附件

### XQJ-TPC-12A 垂直凹弯通护罩(R)


XQJ-TPC-12A Vertical Concave Elbow Joint Cover



序号 No.	型号 Model	B (mm)	重量 (kg) Weight	重量Weight (kg) R=490(mm)
1	XQJ-TPC-12A-1	100	2.15	27.95
2	XQJ-TPC-12A-2	200	3.32	4.32
3	XQJ-TPC-12A-3	300	4.60	5.98
4	XQJ-TPC-12A-4	400	6.00	7.80
5	XQJ-TPC-12A-5	500	12.25	15.93
6	XQJ-TPC-12A-6	600	14.53	18.89
7	XQJ-TPC-12A-8	800	22.88	29.74

### XQJ-TPC-12B 垂直凸弯通护罩(R)


XQJ-TPC-12B Vertical Convex Elbow Joint Cover



序号 No.	型号 Model	B (mm)	重量 (kg) Weight	重量Weight (kg) R=490(mm)
1	XQJ-TPC-12B-1	100	2.89	3.76
2	XQJ-TPC-12B-2	200	4.87	6.33
3	XQJ-TPC-12B-3	300	6.89	8.96
4	XQJ-TPC-12B-4	400	11.87	15.43
5	XQJ-TPC-12B-5	500	14.57	18.84
6	XQJ-TPC-12B-6	600	21.58	28.06
7	XQJ-TPC-12B-8	800	33.99	44.19

### ZQC-ZH-03 吊杆


ZQC-ZH-03 Suspending rod

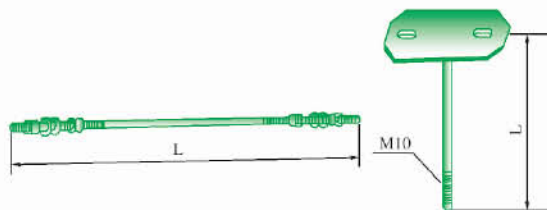

型号 Model	L (mm)	重量 (kg) Weight	备注 Remarks
ZH-03-5	500	1.36	罗圈垫体 配套供应 Bolt can be supplied together on per-piece pricing basis
ZH-03-8	800	2.18	
ZH-03-10	1000	2.72	
ZH-03-12	1200	3.26	
ZH-03-15	1500	4.08	
ZH-03-20	2000	5.44	

### XQJ-C-01B 桥架封头


XQJ-C-01B Support end piece



序号 No.	型号 Model	重量 (kg) Weight	序号 No.	型号 Model	重量 (kg) Weight
1	XQJ-C-01B-1	0.21	11	XQJ-C-01B-11	3.79
2	XQJ-C-01B-2	0.30	12	XQJ-C-01B-12	3.91
3	XQJ-C-01B-3	0.49	13	XQJ-C-01B-13	4.1
4	XQJ-C-01B-4	1.11	14	XQJ-C-01B-14	4.23
5	XQJ-C-01B-5	2.31	15	XQJ-C-01B-15	4.35
6	XQJ-C-01B-6	2.52	16	XQJ-C-01B-16	4.47
7	XQJ-C-01B-7	2.73	17	XQJ-C-01B-17	4.88
8	XQJ-C-01B-8	2.98	18	XQJ-C-01B-18	5.59
9	XQJ-C-01B-9	3.54	19	XQJ-C-01B-19	6.51
10	XQJ-C-01B-10	3.68			

### XQJ-TPC-13 管接头

Coupling Model XQJ-TPC-13

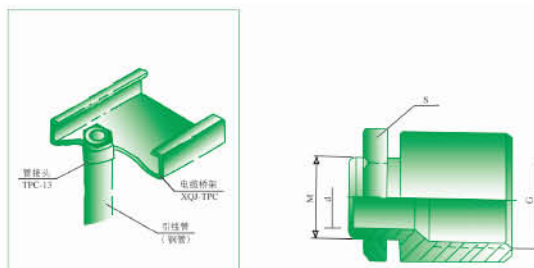

序号 No	型号 Model	配管尺寸G size of pipe	M	d	S	单价 元/只 Unit price	备注 Remarks
1	TPC-13-1/2"	1/2"	M22 × 1.5	18	27	12.40	
2	TPC-13-3/4"	3/4"	M27 × 1.5	22	32	13.20	
3	TPC-13-1"	1"	M33 × 1.5	28	41	24.60	
4	TPC-13-1 1/2"	1 1/2"	M48 × 2	38	55	49.00	
5	TPC-13-2"	2"	M56 × 2	48	65	65.80	

# 喷塑颜色色板

## Spaying Colors Palette



桔纹灰 (726)  
DZ-S01  
Orange gray



浅驼灰  
DZ-S02  
Light camel gray



桔红  
DZ-S03  
Orange red




象牙白  
DZ-S04  
Ivory white



果绿  
DZ-S05  
Fruit green



银灰  
DZ-S06  
Silver gray

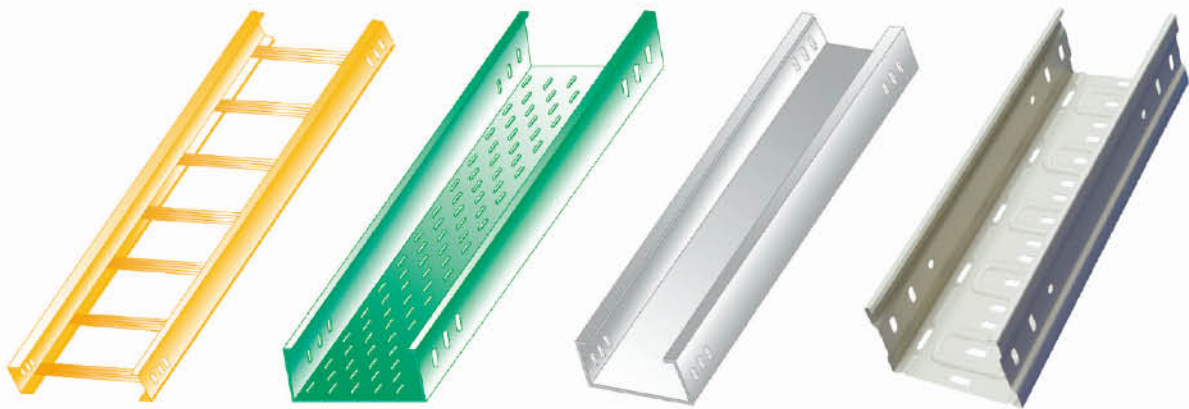

此色样仅供参考，可按客户要求订制。

These color samples are only for reference, we could customize as required.

追求卓越品质 打造世界品牌  
*The pursuit of excellence, to create the world brand*

地址：江苏省扬中市经济开发区码头21号

电话：181 1211 8885

E-mail：jsmgjd@163.com

如有改动，恕不另行通知  
Subject to change without prior notice